

## Industrial Grade

### CAM-TYPE CONNECTORS (UP TO 400A, 600V)

#### 16 Series, Taper Nose



16D22-E



16D31-O


Description	Color	Cat. No.	Cat. No.	Cat. No.
		Complete	Contact	Insulator
Male Detachable Plug - Double Set Screw (Cable Size: #2-2/0)	White	16D22-W	16D22-C	16SDM-22W
	Black	16D22-E	16D22-C	16SDM-22E
	Brown	16D22-H	16D22-C	16SDM-22H*
	Red	16D22-R	16D22-C	16SDM-22R
	Blue	16D22-B	16D22-C	16SDM-22B
	Orange	16D22-O	16D22-C	16SDM-22O*
	Green	16D22-G	16D22-C	16SDM-22G
	Yellow	16D22-Y	16D22-C	16SDM-22Y*
Female Detachable Plug - Double Set Screw (Cable Size: #2-2/0)	White	16D31-W	16D31-C	16SDF-22W
	Black	16D31-E	16D31-C	16SDF-22E
	Brown	16D31-H	16D31-C	16SDF-22H*
	Red	16D31-R	16D31-C	16SDF-22R
	Blue	16D31-B	16D31-C	16SDF-22B
	Orange	16D31-O	16D31-C	16SDF-22O*
	Green	16D31-G	16D31-C	16SDF-22G
	Yellow	16D31-Y	16D31-C	16SDF-22Y*

\* Contact factory for availability.


#### TESTING AND CODE COMPLIANCE

- Meets UL Standards (File #E13399)
- NEMA 3R-Rated (rainproof) for use outdoors
- CSA Certified (File #152105)

## DIMENSIONS

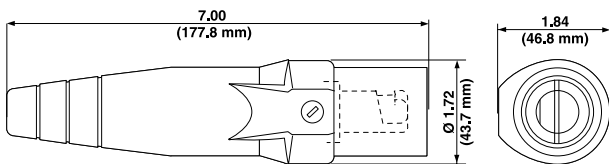

Male Detachable Plug – Double Set Screw

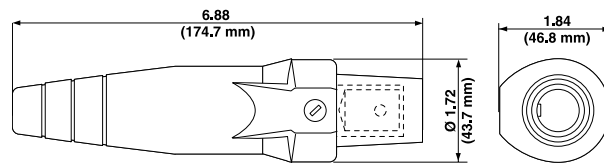

Female Detachable Plug – Double Set Screw