


# Multi-Conductor, Braid Shield

Low Impedance

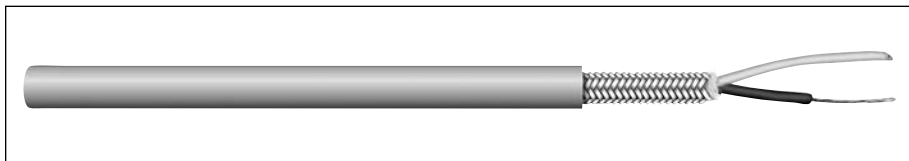

CATALOG NUMBER	TYPE	NO. OF COND.	AWG SIZE	COND. STRAND	NOM. INSULATION THICKNESS		NOM. JACKET THICKNESS		NOMINAL O.D.		NOM. CAP.* pF/ft
					INCHES	mm	INCHES	mm	INCHES	mm	
<b>C1322A</b>	Low Imped.	2	22	16/34	0.025	0.64	0.025	0.64	0.239	6.07	31.0

\*Capacitance between one conductor and other conductors connected to shield

### Color Code Chart

NO. OF COND.	COLOR
1	White
2	Black

### Product Construction:

#### Conductor:

- 22 AWG fully annealed stranded tinned copper per ASTM B-33

#### Insulation:

- Premium-grade, color-coded polyethylene
- Fillers where required
- Color code: See chart below

#### Shield:

- 80% tinned copper braid

#### Jacket:

- PVC, gray
- Temperature range: -20°C to +75°C

### Applications:

- Low-impedance microphones
- Suggested voltage rating: 1000 volts

### Features:

- Flexlife® jacket provides extreme flexibility
- High abrasion resistance
- Outstanding appearance

### Compliances:

- RoHS Compliant Directive 2002/95/EC

### Packaging:

- Please contact Customer Service for packaging and color options