


REV. 0	DESCRIPTION Initial release	DATE 3/14/2019
-----------	--------------------------------	-------------------

Color Code	
-001	Orange
-002	Orange/Black


Use: Road Vehicle Applications

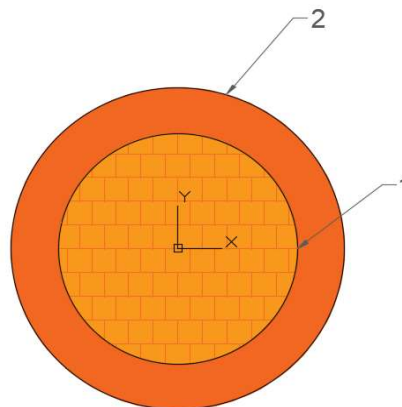

Item	Component	Description	Thickness				Dimensions						
			inch		mm		inch		mm				
			Nom	Min	Nom	Min	Nom	Tol	Nom	Tol			
1.	Conductor:	5.0mm² 70/.29mm BC											
2.	Insualtion	EXRAD Ergo-Flex2	0.026	0.021	0.66	0.53	<D>	0.107	0.005	2.72	0.13	4.04	0.13

Print: CHAMPLAIN CABLE 5MM2 THIN WALL ERGOFLEX-2 ISO 19642

Voltage Rating: 1000 Volts AC
 Temperature Range: -40° C to +150° C
 Meets Requirements of: ISO 19642 Class D Thin Wall
 Weight: 33.88 #/Mft Nom.
 Static Bend Radius: inches 0.5 mm 12

	TITLE 5.0mm² ERGO-FLEX-2 Thin Wall ISO19642		
	DRN. R. Trahan	DATE 3/14/2019	
Special Characterisitics <S> Safety <D> Dimensional	CKD.	DATE	
DO NOT SCALE THIS DRAWING	SIZE A	PART NUMBER 15-08642	DOCUMENT NUMBER 17711
The information on this drawing is the proprietary property of Champlain Cable Corporation, and may not be used, reproduced or disclosed to others, in whole or in part, without written authorization.		This is an uncontrolled preliminary drawing that requires validation of standards or conformances	
			PAGE 1 of 1