

1) CONSTRUCTION: NOM. DIA.  
 CONDUCTOR: 18 AWG 16/30 TINNED COPPER .045"  
 INSULATION: LEAD FREE SEMI-RIGID POLYVINYLCHLORIDE, .013" NOM. WALL THICKNESS .071"  
 CABLE: (2) COLOR CODED SINGLES TWISTED TOGETHER TO FORM A CABLE CORE .142"  
 JACKET: LEAD FREE POLYVINYLCHLORIDE, BLACK, .032" NOM. WALL THICKNESS .206"  
OVERALL CABLE DIAMETER

2) PHYSICAL PROPERTIES:  
 TEMPERATURE RATING, MAX. 60°C & 80°C  
 WT./M', NOM., NET. 26.4 LBS.

3) ELECTRICAL CHARACTERISTICS:  
 CAPACITANCE, MUTUAL, NOM. 30 PF/FT.  
 DIELECTRIC WITHSTANDING, MIN 1500V RMS  
 VOLTAGE RATING, MAX. 300V  
 D.C. RESISTANCE, MAX. PER ASTM B286 7.15 OHMS/M'


4) AGENCY APPROVALS:  
 NEC (UL) TYPE CM  
 CSA AWM FT4  
 UL AWM STYLE 2464


5) APPLICATION:  
 INSTRUMENTATION, AUDIO, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT: (WHITE INK)  
 E118830 (UL) TYPE CM 18 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --  
**(LOT DESIGNATOR)**

7) COLOR CODE:  
 1. BLACK  
 2. RED

8) PACKAGING  
 TO BE PACKAGED AS PER QWC'S  
 STANDARD PACKAGING

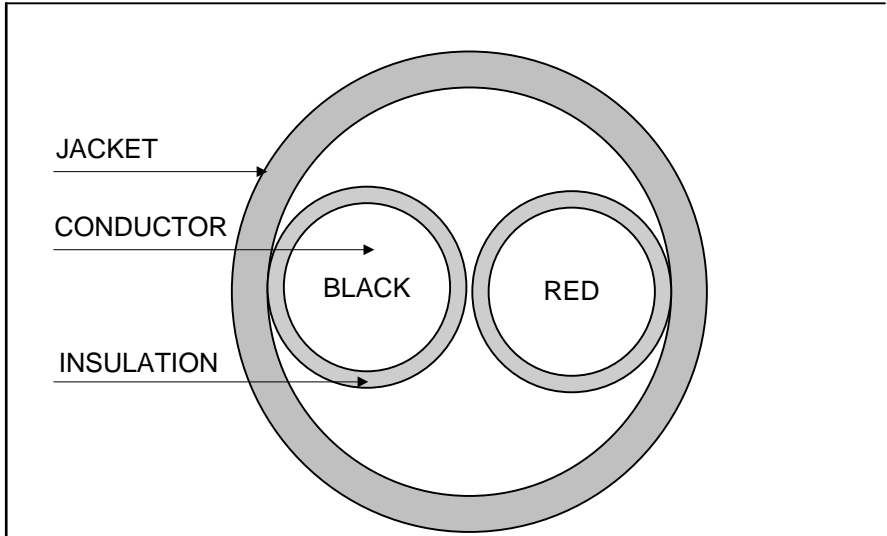

REVISION 03	DATE:	DRAWN G. MUNROE 11/22/00	
REVISED BY	B. M. DUCZYNSKI 4/25/05	CHECKED G. MELNIK 11/22/00	
CHECKED	J. RIVERNIDER 4/25/05	CHECKED	
CHECKED	R. KOCZUR 4/25/05	CUSTOMER APPROVAL: DATE:	TITLE
			2/C 18 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, CSA AWM FT4
			QUABBIN P/N 02237
			1 OF 1