

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	18 AWG 16/30 STRANDED TINNED COPPER	.045"
INSULATION:	SEMI-RIGID POLYVINYLCHLORIDE, .013" NOM. WALL THICKNESS	.071"
CABLE:	(2) COLOR CODED SINGLES TWISTED TOGETHER TO FORM A CABLE CORE	.142"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	
	OVERALL CABLE DIAMETER	.206"

2) PHYSICAL PROPERTIES:	
TEMPERATURE RATING, MAX.	60°C & 80°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	23.2 LBS.

3) ELECTRICAL CHARACTERISTICS:	
CAPACITANCE, MUTUAL, NOM.	30 PF/FT.
DIELECTRIC WITHSTANDING, MIN.	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	7.15 Ω/1000'

- 4) AGENCY APPROVALS:
 NEC (UL) TYPE CM
 CSA AWM FT4
 UL AWM STYLE 2464

5) APPLICATION:
 INSTRUMENTATION, AUDIO, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 4560 (UL) TYPE CM 18 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 --
 RoHS -- **(LOT DESIGNATOR)**


- 7) COLOR CODE:
 1. BLACK
 2. RED

8) PACKAGING
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

JACKET

CONDUCTOR

INSULATION

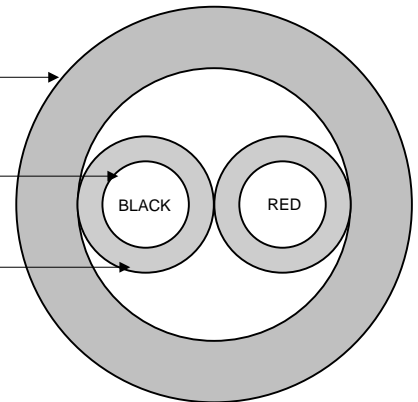

Created 11/07/94	DRAWN: BMD 09/16/15	
REV. 07	CHECKED: GBM 09/17/15	
TITLE 2/C 18 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, CSA AWM FT4		
QUABBIN P/N	4560	1 of 1

CUSTOMER APPROVAL:

DATE: