

4140

1) CONSTRUCTION: NOM. DIA.
 CONDUCTOR: 18 AWG 7/26 STRANDED TINNED COPPER .048"
 INSULATION: POLYVINYLCHLORIDE, .016" NOM. WALL THICKNESS .080"
 CABLE: (2) COLOR CODED SINGLES TWISTED TOGETHER TO FORM A CABLE .160"
 CORE .160"
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .025" NOM. WALL .210"
 THICKNESS OVERALL CABLE DIAMETER

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C, 80°C & 90°C
 WT./M', NOM., NET. 27.4 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL AT 1MHZ, NOM. 15 PF/FT.
 DIELECTRIC WITHSTANDING, MIN 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. PER ASTM B286 6.54 Ω/1000'


4) AGENCY APPROVALS:
 NEC (UL) TYPE CM
 CSA AWM FT4
 UL AWM STYLE 2095

5) APPLICATION:
 INSTRUMENTATION, AUDIO, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 4140R (UL) TYPE CM 18 AWG OR AWM 2095 -- CSA LL51726 AWM I/II A/B 90C 300V FT4 -- RoHS --
 (LOT DESIGNATOR)

7) COLOR CODE:
 1. BLACK
 2. WHITE

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

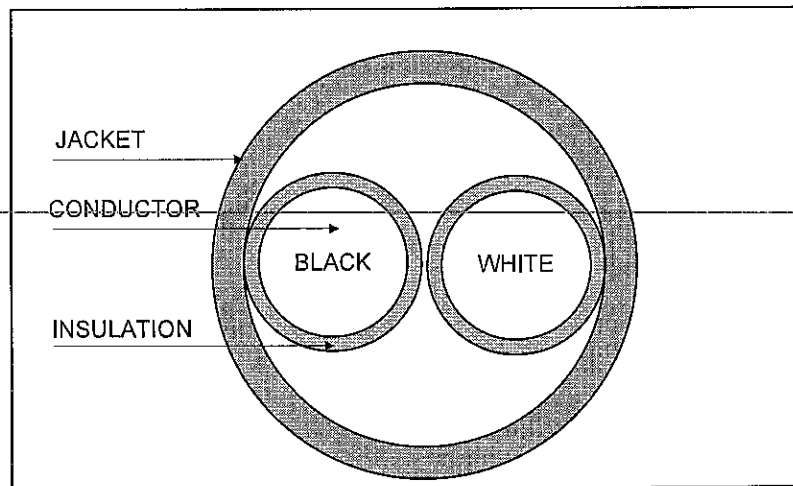

REVISION 06	DATE:	DRAWN J. RIVERNIDER 11/04/94	
REVISED BY	<i>B. Duzynski</i> 5/21/08	CHECKED G. MELNIK 11/07/94	
CHECKED	<i>G. Numa</i> 5/21/08	CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 2/C 18 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2095, CSA AWM FT4
			QUABBIN P/N 4140 1 OF 1