


GeneralCable
TWO CONDUCTOR #18AWG SHIELDED CABLE

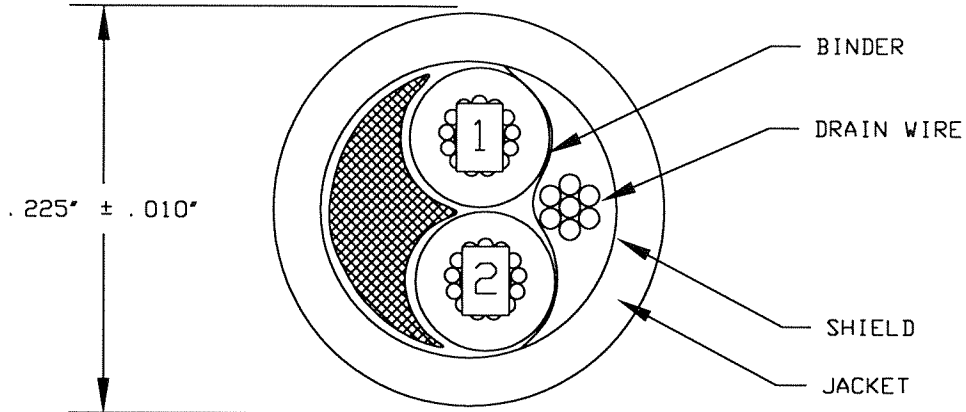

- COMPONENT I - PRIMARY
(ITEMS 1-2) CONDUCTOR: #18AWG 19/30 TINNED COPPER
INSULATION: XLPE-.016" NOMINAL WALL
DIAMETER: .079" NOMINAL
- FILLER - AS REQUIRED TO MAINTAIN A CIRCULAR CABLE CROSS-SECTION
- CABLE - CORE: TWO (2) COMPONENT I (ITEMS 1-2) + ONE (1)
FILLER CABLED TOGETHER WITH A L. H. LAY
- BINDER - .001" MYLAR TAPE-10% MIN. OVERLAP
- DRAIN WIRE - #24AWG 7/32 TINNED COPPER
- SHIELD - .0015" ALUMINUM/MYLAR TAPE-25% MIN. OVERLAP
- JACKET - XLPE (GRAY)-.033" NOMINAL WALL
- DIAMETER - .225" ± .010"
- NET CABLE WGT- 35 LBS. /1000'
- UL - AWM STYLE 4312 125°C 300V
- CSA - AWM IIA 125°C 300V
- JACKET PRINT: *GENERAL CABLE BRAND REX BRAND (WC) RJ AWM STYLE 4312/CSA
AWM IIA 125C 300V FT1/ROHS COMPLIANT DAY/MONTH/YEAR*
- | COLOR CODE - | ITEM NUMBER | COLOR |
|--------------|-------------|-------|
| | 1 | BLACK |
| | 2 | WHITE |

REVISIONS		DATE	DESCRIPTION	GeneralCable 1600 West Main Street, Willimantic, CT 06226-1128 <u>The Power Of One</u>
	0	02/24/98	FIRST ISSUE	DRAWING NO: 12-631
	A	10/06/06	UPDATE DRAWING	
REFERENCES	IEWC/GE #68A9384P218 GeneralCable P/N 683010.08 T-10251 (2/18)			DRAWN BY: W. DRABEK APPROVED BY: M. LAJEUNESSE
THIS DRAWING IS THE PROPERTY OF GeneralCable COMPANY AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable COMPANY				