

## 5175 Cable

**Conductors:** 18 AWG 16/30 Tinned Copper

**Insulation:** .016" General Purpose PVC per UL 1007

**Diameter:** .084" Nominal Diameter

**No. of Conds:** 3 Conductors Red + Black + Green

**Cable:** Cable three conductors with a clear mylar wrap


**Overall Jacket:** Gray PVC Jacket (No rip cord)

**Thickness:** .032" Nominal Thickness

**Diameter:** .236" Nominal

**Compliances:** NEC Article 800 Type CMG (UL:75°C)  
UL Style 2464 (UL 80°C 300V)  
UL Style 2576 (UL 80°C 150V)  
CSA CMG (CSA 60°C)  
RoHS & REACH Compliant

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	2	Remove Rip Cord	5/4/11	

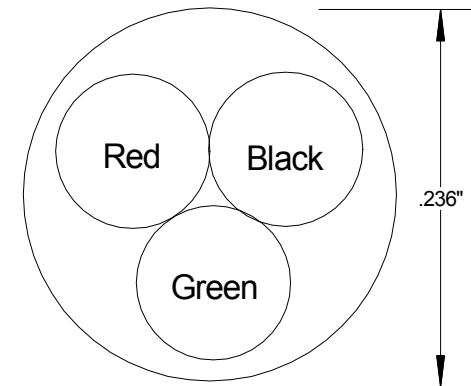

## *Product Specification*

Drawn By:	Product Description	REV
Brian Hanlon	18 AWG 3 Conductor Cable	2
Date:	Drawing No. # 5175	
November 10, 2010		