

| | | |
|------------------|--|-----------|
| 1) CONSTRUCTION: | | NOM. DIA. |
| CONDUCTOR: | 18 AWG 16/30 STRANDED TINNED COPPER | .045" |
| INSULATION: | LEAD FREE POLYVINYLCHLORIDE, .016" NOM. WALL THICKNESS | .077" |
| CABLE: | (3) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE | .166" |
| JACKET: | POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS | |
| | OVERALL CABLE DIAMETER | .230" |

| | |
|--------------------------|-----------|
| 2) PHYSICAL PROPERTIES: | |
| TEMPERATURE RATING, MAX. | 105°C |
| WT./M', NOM., NET. | 33.9 LBS. |

| | |
|--------------------------------|-----------|
| 3) ELECTRICAL CHARACTERISTICS: | |
| CAPACITANCE, MUTUAL | 25 PF/FT |
| DIELECTRIC WITHSTANDING, MIN | 1500V RMS |
| VOLTAGE RATING, MAX. | 300V |
| D.C. RESISTANCE, MAX. | 6.7 OHMS |


4) AGENCY APPROVALS:
UL AWM STYLE 2517


5) APPLICATION:

6) PRINT:
E69976 **RU** AWM STYLE 2517 -- RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:
1. BLACK
2. WHITE
3. GREEN

8) PACKAGING
TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

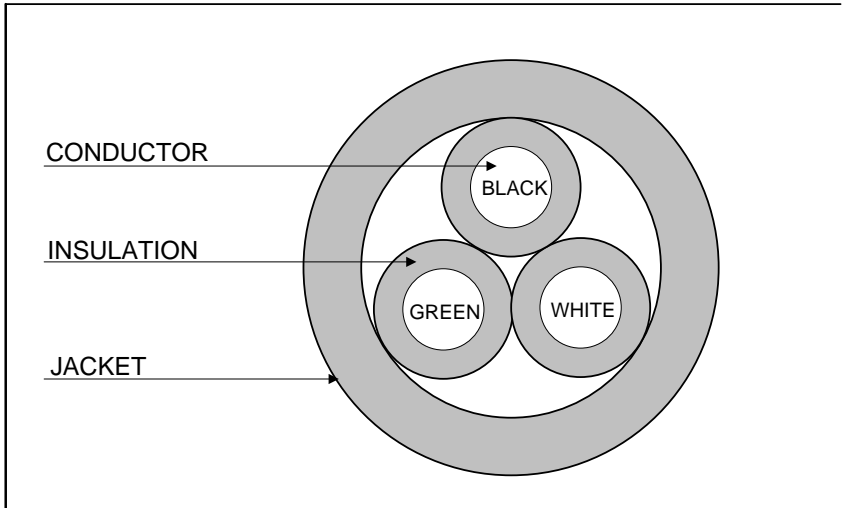

| | | | |
|-------------|-------------------------|--------------------------------|---|
| REVISION 02 | DATE: | DRAWN B. M. DUCZYNSKI 11/16/04 | |
| REVISED BY | B. M. DUCZYNSKI 8/31/05 | CHECKED J. RIVERNIDER 11/16/04 |  |
| CHECKED | J. RIVERNIDER 8/31/05 | CHECKED | |
| CHECKED | | CUSTOMER APPROVAL: DATE: | TITLE |
| | | | 3/C 18 AWG PVC/PVC UNSHIELDED CABLE -- AWM 2517 |
| | | | QUABBIN P/N 03084 |
| | | | 1 OF 1 |