


REV.	RELEASE NO.	DATE	DRAWN	APP.
1	04-4337	11/5/04	GJR	<i>202</i>
2	04-4394	12/6/04	GJR	

THIS DRAWING REPRESENTS CONFIDENTIAL AND PROPRIETARY INFORMATION OF SSI TECHNOLOGIES, INC. AND SHALL NOT BE USED, ALTERED, OR DISCLOSED, IN WHOLE OR IN PART, WITHOUT THE EXPRESS WRITTEN APPROVAL OF SSI TECHNOLOGIES, INC. ANY USE OF THIS DRAWING SHALL BE SUBJECT TO SSI TECHNOLOGIES, INC. SUPPLIER QUALITY ASSURANCE SPECIFICATION SW3901.



SSI Technologies, Inc

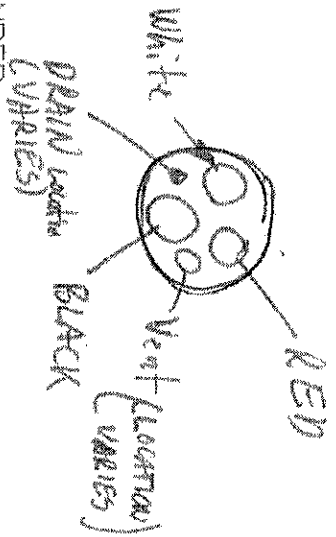

NOTES:

- 1) 3 CONDUCTORS: 18 GAGE STRANDED, TINNED COPPER, 9 MILS PVC - INSULATION, COLORS: RED, BLACK, AND WHITE
- 2) OPAQUE MYLAR WRAP:
- 3) 20/7X .0121TC DRAIN
- 4) SHIELD: ALUMINUM/MYLAR FOIL, 25% MIN OVERLAP
- 5) NYLON VENT TUBE: I.D.: 0.81
WALL: 0.38
O.D.: 1.57
- 6) CABLE JACKET: 15 MILS PVC - BLACK
105°C
5.84 ±0.13 (.230 ±0.005) FINISHED O.D.
- 7) SOURCES: NORTHWIRE INC. P/N: FAWN183-103, REV "B"
- 8) **CRITICAL COLOR ROTATION: ORIENTATION OF INSULATED CONDUCTORS MUST BE AS SHOWN AT TOP OF EACH REEL (RED, BLACK, WHITE - COUNTERCLOCKWISE)**

JOB		DO NOT SCALE		ASSEMBLY NO.	
PRESSURE SENSOR				-	
NAME 3 CONDUCTOR CABLE BULK - VENTED		3RD ANGLE PROJECTION 		CUSTOMER I.D. -	
MATERIAL SEE NOTE		REFER TO ANSI Y14.3M-1994		DRAWG. NO. 14362.1	
DWG SIZE A		SHEET 1 OF 1		SCALE N/A	
VERSION NX		COMPUTER DRAWN NO MANUAL CHANGE		REV. 2	

#773009