

CONDUCTORS - 18 AWG (16/30) TINNED COPPER INSULATED WITH .010" S-R PVC TO A NOMINAL O.D. OF .066".


- 3 TOTAL - COLOR CODE SEE DIAGRAM BELOW

ENVIRONMENTALS

"RoHS" COMPLIANT

TAPE

ALUMINUM/MYLAR WITH ALUMINUM SIDE FACING OUT 25% MIN. OVERLAP

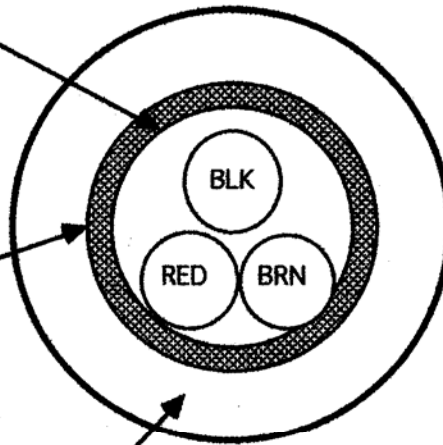

BRAID

36 AWG TIN/CU 70% COVERAGE

JACKET - .032" NOMINAL WALL OF GRAY PVC TO A NOMINAL O.D. OF .232".(.220" MIN., .243" MAX)
CABLE IS SURFACE PRINTED IN BLACK INK PER UL/CSA

LISTINGS

UL AWM STYLE 2464 80C 300V
CSA TYPE CMG

DATA GUIDE

CABLE CORP.

ONE ERNRIC PLACE
560 MAIN STREET
GARDNER, MA 01440
508-632-0900

REV.	DESCRIPTION	DATE	APP.
0	FIRST ISSUE	7/5/07	

TITLE
3/C 18AWG (1803CSS-8DGE)

SCALE N/A	P/N 96J30-1	REV
--------------	----------------	-----

DATE 7/07	DRN. BY WJD	APP. BY
--------------	----------------	---------