



DESC: 18/3 SJTW 105°C BLACK SHIELDED

DWG NO: 1803J006

SCALE: 20x DATE: 8/25/98

DR. BY: DP LANGER

NWI P/N: FSJT183-127

CUSTOMER: INDUSTRIAL ELECTRIC

CUSTOMER P/N: SJT1803WS-0/105C


ITEM

SPECS.

- A. 18 GAUGE 16x30BC BUNCHED
NOM. O.D. .049±.003"
- B. 30 MILS PVC INSULATION 105°C 300V
27 MILS MIN. PVC INSULATION
NOM. O.D. .110±.002" STANDARD SJT INNERS
- C. PAPER FILLER
- D. 20 GAUGE 7x.0121TC CONCENTRIC DRAIN
NOM. O.D. .0363±.001"
- E. ALUMINUM FOIL SHIELD
25% MIN. OVERLAP 100% COVERAGE
- F. 30 MILS PRESSURED PVC JACKET 105°C 300V
24 MILS MIN. PVC JACKET BLACK JACKET
CABLE IS UL AND CSA APPROVED

NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

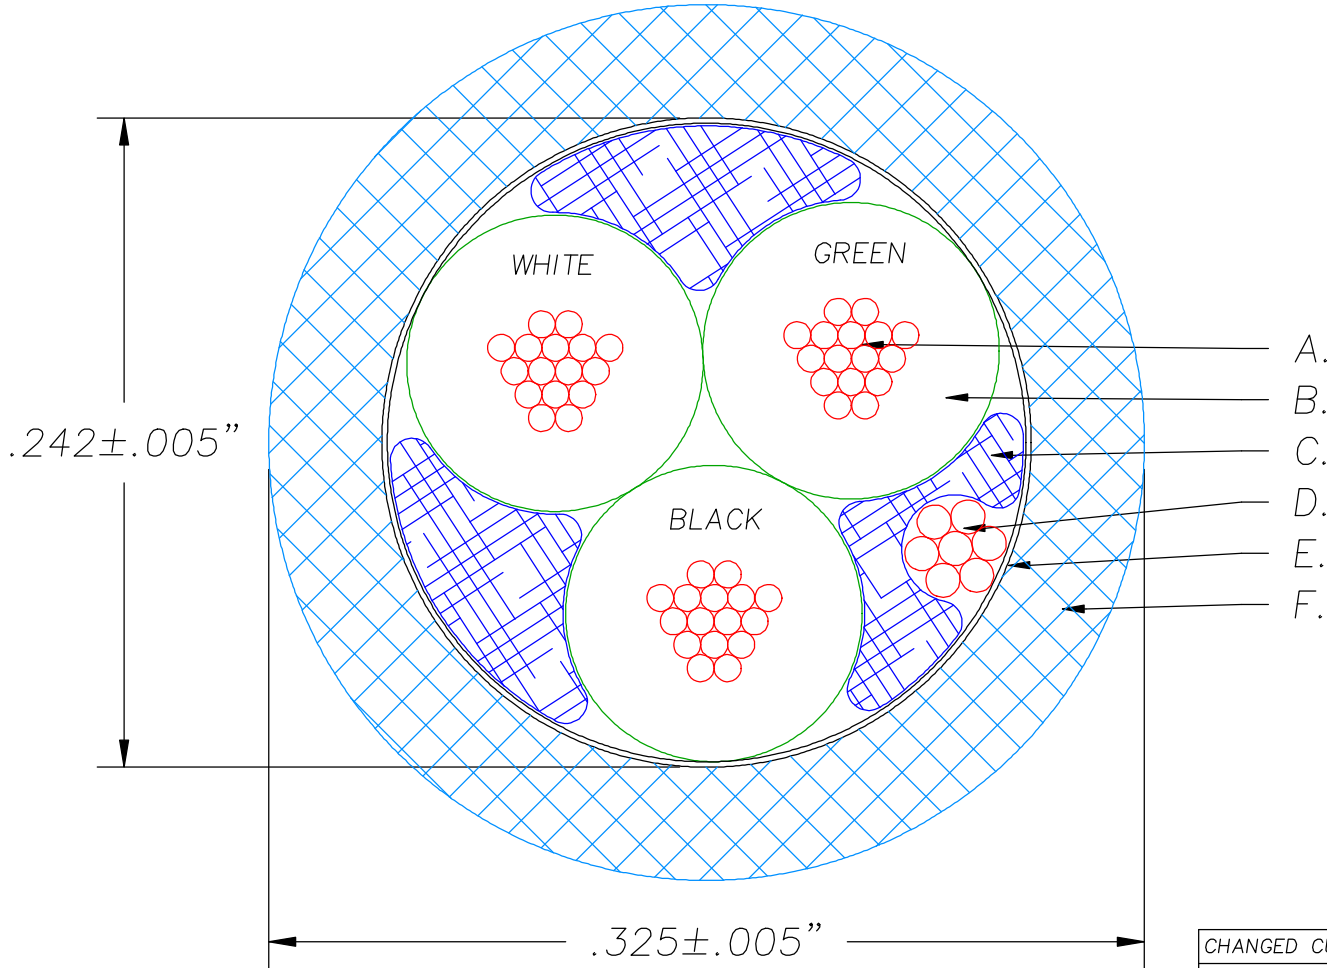

- A.
- B.
- C.
- D.
- E.
- F.

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

CHANGED CUSTOMER PART NUMBER	B	5/5/03	DPL	
INITIAL RELEASE	A	8/25/98	DPL	
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL