


GeneralCable

THREE CONDUCTOR 18AWG SHIELDED CABLE

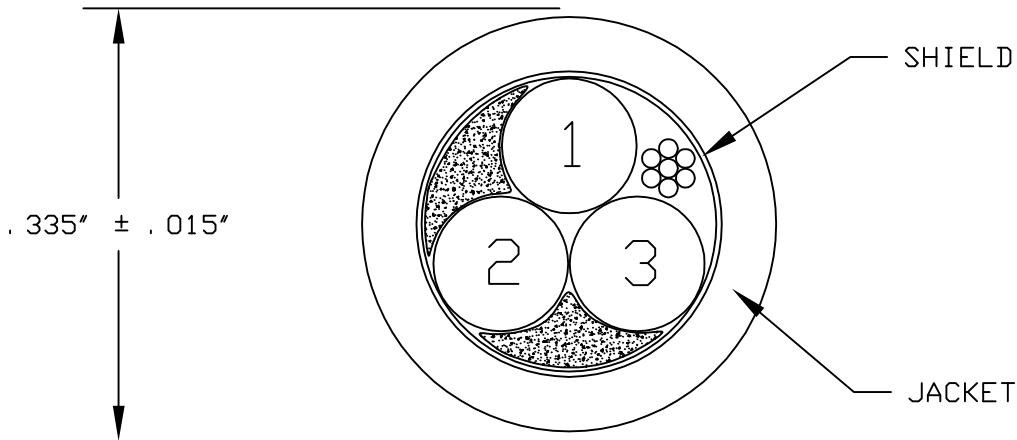

COMPONENT I- (ITEMS 1-3) CONDUCTOR: 18AWG 19/30 TINNED COPPER
 INSULATION: XLPE-.031" NOMINAL WALL
 DIAMETER: .109" NOMINAL

FILLERS- AS REQUIRED TO MAINTAIN A CIRCULAR CABLE CROSS-SECTION

DRAIN WIRE- 20AWG 7/28 TINNED COPPER

CABLE- CORE: THREE (3) COMPONENT I (ITEMS 1-3) + DRAIN WIRE +
 FILLERS CABLED TOGETHER WITH A L. H. LAY

SHIELD- .0015" ALUMINUM/MYLAR TAPE -25% MIN OVERLAP

JACKET- XLPE (GRAY)-.047" NOMINAL WALL

DIAMETER- .335" NOMINAL

UL- AWM STYLE 4313 125°C 600V

CSA- AWM IIA 125°C 600V

NET CABLE WEIGHT- 70 LBS/1000'

JACKET PRINT- "68A9385P318 GENERAL CABLE BRAND REX BRAND (WC) RJ AWM STYLE
 4313/CSA AWM IIA 600V XLPE FTI/ROHS COMPLIANT DAY/MONTH/YEAR"

COLOR CODE-	ITEM NUMBER	COLOR
	1	BLACK
	2	WHITE
	3	RED

REVISIONS	0	07/22/11	FIRST ISSUE	GeneralCable 1600 West Main Street, Willimantic, CT 06226-1128 <u>The Power of One</u>
REFERENCES	GE P/N 68A9385P318GY			DRAWING NO: 12-1871
	GeneralCable P/N 267880			
	T-14695 (3/18)			DRAWN BY: CAD
				APPROVED BY: M. LAJEUNESSE
THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable				