



DESC: 18/4 AWM 20626 80°C 300V

DWI NO: 1804A058

SCALE: 15x

DATE: 10/21/04

DR. BY: DP LANGER

NWI NO: FAWM184-079

CUSTOMER: INDUSTRIAL ELECTRIC

CUSTOMER P/N: 1804C-4NWA


ITEM

SPECS.

- A. 18 GAUGE 65x36TC BUNCHED
O.D. .049±.003"
 - B. 14 MILS POLYETHYLENE INSULATION 80°C 300V
12 MILS MIN. POLYETHYLENE INSULATION
O.D. .077±.002" AWM STYLE 1973
 - C. POLY FILLER
 - D. SPUN NYLON TAPE
20% MIN. OVERLAP 100% COVERAGE
 - E. 30 MILS PRESSURED ENDUROFLEX JKT 80°C 300V
24 MILS MIN. YELLOW ENDUROFLEX JACKET
UL AND CSA RECOGNIZED
- BAND MARK INK STRIPES
- LOW END TEMP. RATING: -50C

NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

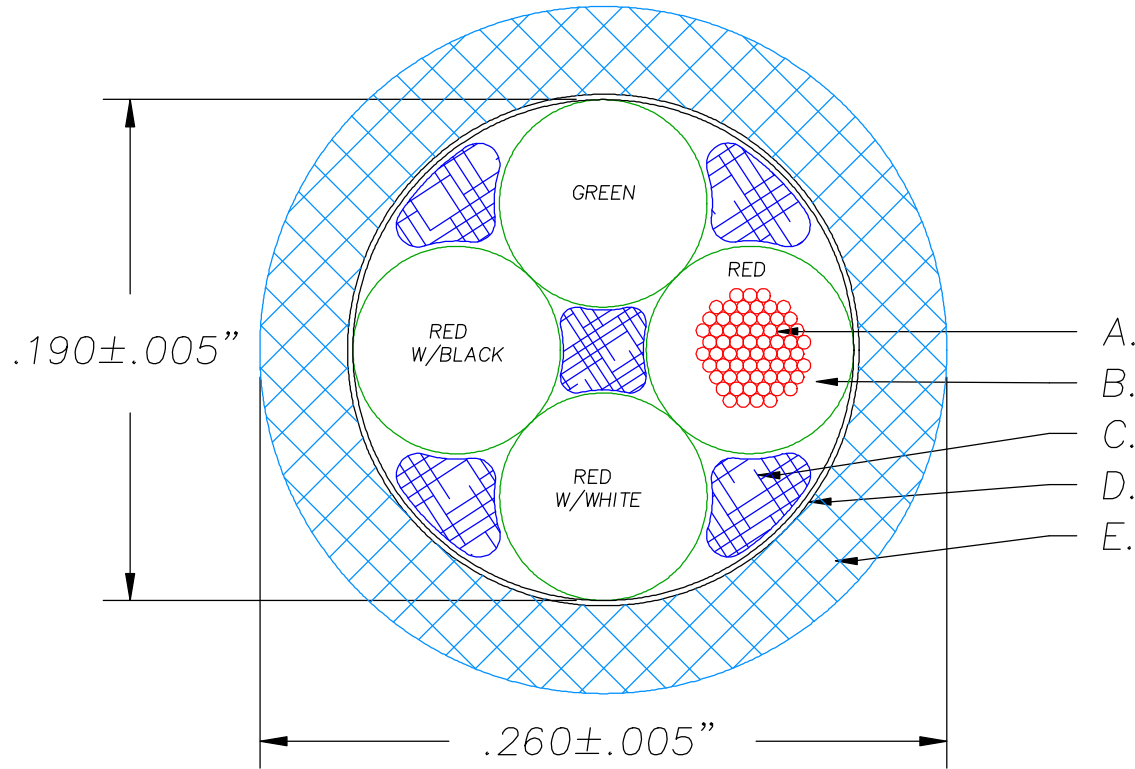

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
MINIMUM BEND RADIUS: 1.50"

LEGEND IN BLACK INK:
18 AWG/4 RU AWM 20626 80°C VW-1 E54661 CSA AWM I/II A/B 80°C 300V FT1 LL54185

ADDED FILLER DOWN CENTER; CHANGED TO FLAME RETARDANT FILLER & INSUL.	B	3/13/06	DPL	
INITIAL RELEASE	A	10/21/04	DPL	
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL