


REV.	NOA NO.	DATE	DESCRIPTION OF CHANGE	DRAWN	APP.
1	07-5452	01/11/07	INITIAL RELEASE	AIL	DQS
2	08-4048	08/25/08	ADDED WIRE ORDER VIEW; CHANGED ALL NOTES	AIL	TCR



WIRE ORDER VIEW

THIS DRAWING AND PROPRIETARY INFORMATION OF SSI TECHNOLOGIES, INC. AND SHALL NOT BE USED, ALTERED, OR DISCLOSED, IN WHOLE OR IN PART, WITHOUT THE EXPRESS WRITTEN APPROVAL OF SSI TECHNOLOGIES, INC. ANY USE OF THIS DRAWING SHALL BE SUBJECT TO SSI TECHNOLOGIES, INC. SUPPLIER QUALITY ASSURANCE SPECIFICATION 50A5001.

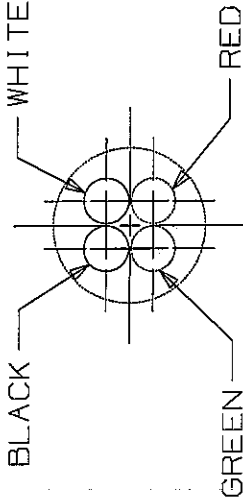

SSI Technologies, Inc.

**NOTES:**

- 4 CONDUCTORS: 18 GAGE 65x36TC BUNCHED O.D.  $1.24 \pm 0.08$  ( $0.049 \pm 0.003$ ), 9 MILS SR-PVC INSULATION, 7 MILS MIN INSULATION O.D.  $1.78 \pm 0.05$  ( $0.070 \pm 0.002$ )  
WIRE COLORS: RED, BLACK, WHITE AND GREEN
- 24 GAUGE 7X.0096TC DRAIN
- SHIELD: ALUMINUM/MYLAR FOIL, 25% MIN OVERLAP
- CABLE JACKET: 30 MILS PRESSURED PVC JACKET  
24 MILS MIN OIL RESISTENT PVC JACKET  
JACKET COLOR BLACK  
 $6.10 \pm 0.13$  ( $0.240 \pm 0.005$ ) FINISHED O.D.
- SOURCES: NORTHWIRE INC. P/N: FAWM184-100
- CRITICAL COLOR ROTATION: ORIENTATION OF INSULATED CONDUCTORS MUST BE AS SHOWN AT TOP OF EACH REEL (DRAIN TO BE BETWEEN RED AND GREEN)

JOB		PRESSURE SENSOR		DO NOT SCALE		ASSEMBLY NO.		-	
NAME		4 CONDUCTOR WIRE - BULK		3RD ANGLE PROJECTION		CUSTOMER I.D.			
MATERIAL		SEE NOTES		REFER TO ASME Y14.5M-1994		DRWG. NO.		24559.1	
DWG SIZE		A		SCALE		VERSION		REV.	
SHEET		1 OF 1		4:1		NX4		2	
A		B		C		D		E	
F		G		H		I		J	
K		L		M		N		P	
Q		R		S		T		U	
V		W		X		Y		Z	