



DESC: 18/4 AWM 2516 105°C 600V

DWG NO: 1804A029

SCALE: 15x

DATE: 2/14/01

DR. BY: DP LANGER

NWI NO: FAWM184-053


CUSTOMER: INDUSTRIAL ELECTRIC

CUSTOMER P/N: 1804COFS-0NWE

ITEM	SPECS.
A.	18 GAUGE 16X30tc BUNCHED NOM. O.D. .049±.003"
B.	31 MILS PVC INSULATION 105°C 600V 28 MILS MIN. PVC INSULATION NOM. O.D. .110±.002" AWM STYLE 1500
C.	CLEAR MYLAR WRAP 20% MIN. OVERLAP 100% COVERAGE
D.	18 GAUGE 7x.0152TC DRAIN
E.	ALUMINUM FOIL SHIELD, FOIL IN 25% MIN. OVERLAP 100% COVERAGE
G.	45 MILS TUBED PVC JACKET 105°C 600V 36 MILS MIN. PVC JACKET BLACK JACKET UL AND CSA APPROVED

**NORTHWIRE RESTRICTED**

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

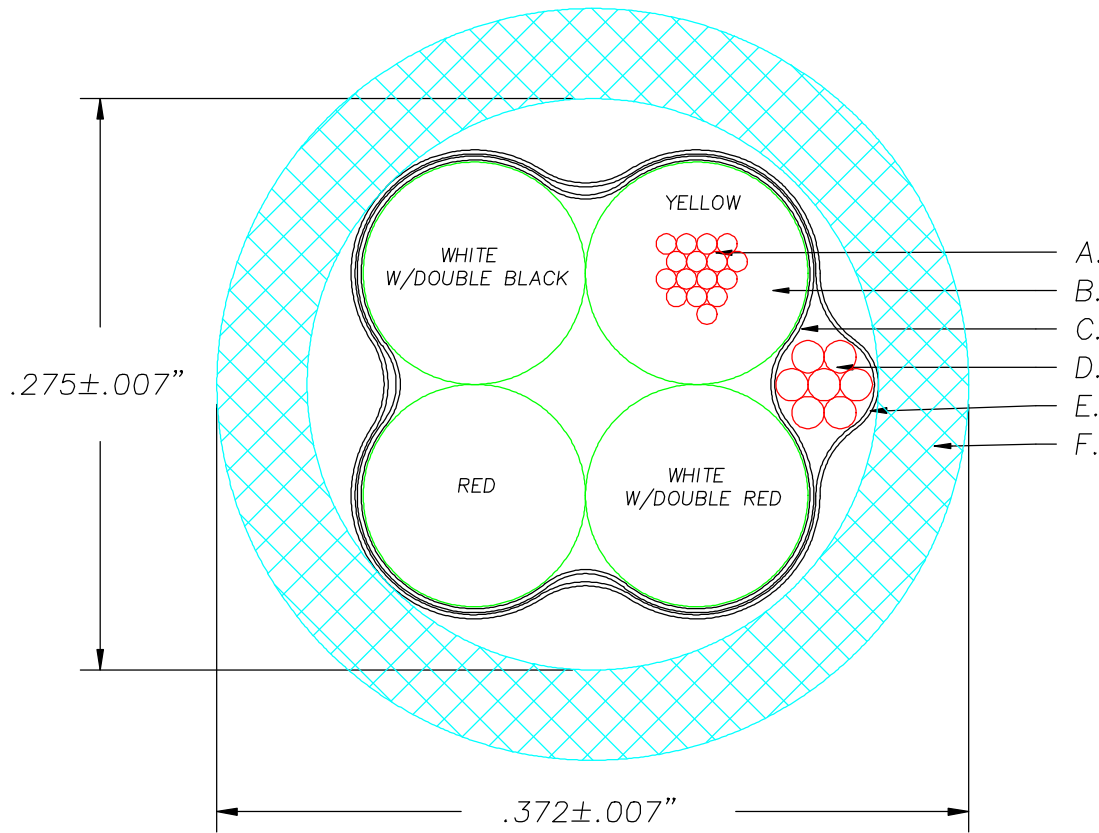

ELECTRICAL REQUIREMENTS:  
NONE SPECIFIED

MECHANICAL REQUIREMENTS:  
STRIPES ARE LONGITUDINAL EXTRUDED STRIPES  
APPROXIMATELY 120° APART

CHANGED CUSTOMER PART NUMBER	B	7/7/03	DPL	
INITIAL RELEASE	A	2/14/01	DPL	
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL