


232 Sherman Street Gardner, MA 01440 Phone: 978-632-0900 Fax: 978-630-1872 Visit us on our website; www.dataguidecable.com

5 CONDUCTOR 18 AWG CABLE -40C 105C 300VOLT SUNLIGHT RESISTANT

CONDUCTOR:

- 18 AWG (105X38) Tinned Annealed Copper Insulated with .016 Wall of 105C PVC to a Nominal O.D. of .081"
- 5 Conductor Total
- Color Coded as Indicated

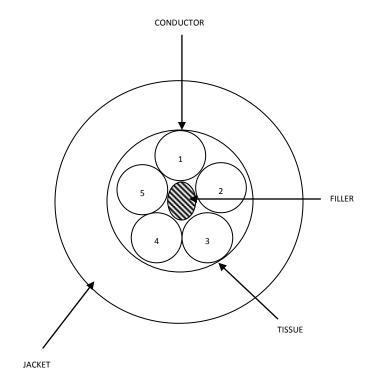

Notes:

- Polypropylene Filler in Area Core to Promote a Circular Core
- Conductors Cabled With 3" Nominal Left Hand Direction Lay
- Overall .0012" Thickness Tissue Separator Under Jacket
- Overall .030" Minimum Average Wall Purple TPU "Pressured" Jacket to .322" Nominal Final Diameter (+/- .010")
- Surface Printed in Black Ink:

"E90298 AWM 20375 105C 300V - - LL91737 CSA AWM I/II A/B 105C 300V FT1"

- Cable Weight: 66 LBS/1000'

AGENCY APPROVAL

- UL AWM 20375 105C 300VOLTS
- CSA AWM FT1 105C 300VOLTS
- Rohs Compliant

CONDUCTOR #	COLOR
1	BLUE
2	BLACK
3	BROWN
4	WHITE
5	GREEN WITH YELLOW STRIPE
3	SALER WITH PERSON STATE

REVISION HISTORY

Customer Number		
D.G. Part Number	11K8-7	
Prepared By: KAM		
Reviewed By: WJD		

0	12/09/2011	WD	FIRST ISSUE