


- CONDUCTORS** -18 AWG (16/30) BARE COPPER INSULATED WITH .016" NOMINAL WALL OF LEAD FREE PVC TO A NOMINAL O.D. OF .078".
- 5 CONDUCTORS TOTAL
 - COLOR CODE: SEE DIAGRAM BELOW

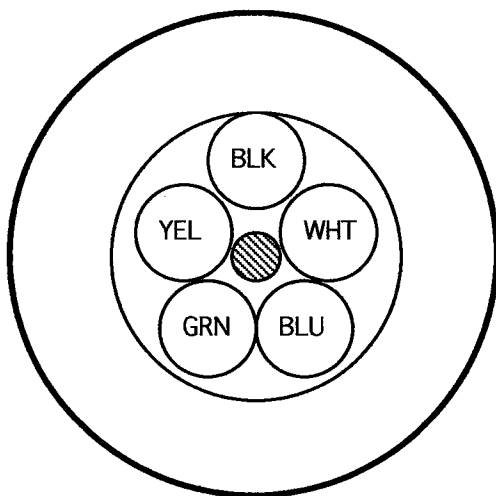

- .001" NOMINAL THICKNESS POLYESTER BINDER TAPE
- .032" NOMINAL WALL THICKNESS "GRAY" LEAD FREE PVC JACKET TO .277" NOMINAL FINAL DIAMETER
- SURFACE PRINTED IN BLACK INK TO UL AND CSA AS FOLLOWS:
"E90298 RU AWM STYLE 2517 105C 300V FT1 -- LL91737 CSA AWM I/IIA/B 105C 300V FT1"
- THIS CABLE IS "ROHS" COMPLIANT

DATA GUIDE

CABLE CORP.

ONE ERNRIC PLACE
560 MAIN STREET
GARDNER, MA 01440
978-632-0900

TITLE
5C 18AWG UNSHIELDED PVC/PVC UL/CSA/ROHS

SCALE
N/A

P/N
07K9-4

REV

DATE
10/07

DRN. BY
WJD

APP. BY

REV.	DESCRIPTION	DATE	APP.
1	INITIAL RELEASE	10/11/07	