

DESCRIPTION: 18/5 AWM 2587 90C 600V

CUSTOMER: IEWC

CUSTOMER P/N: TBD

NWI P/N: TBD

DRAWN BY: DP LANGER

UNITS: IN

SCALE: 12:1



DWG NO: 51261-4

DATE: 11/20/2014 REV: 1

ITEM	SPECIFICATIONS
A.	18 GAUGE 16x30TC BUNCHED
B.	15 MIL PVC INSULATION PER UL AWM 10340 13 MIL MIN. PVC INSULATION O.D. .079 ±.002"
C.	POLY FILLER
D.	TISSUE PAPER SEPARTOR
E.	30 MIL PRESSURED PVC JACKET 90C 600V 24 MIL MIN. PVC JACKET GRAY JACKET UL RECOGNIZED AND CSA CERTIFIED

ROHS COMPLIANT MATERIALS TO EU DIRECTIVE 2011/65/EU

CORE DIMENSIONS FOR INTERNAL USE ONLY

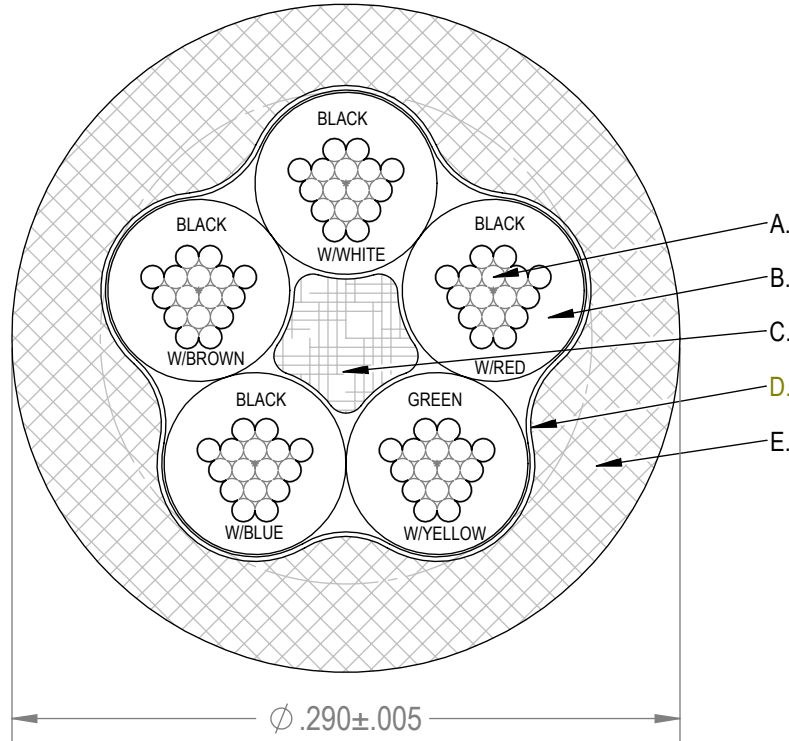

ISOMETRIC VIEW FOR REFERENCE ONLY

LEGEND SPECIFICATIONS



This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

DESCRIPTION: 18/5 AWM 2587 90C 600V

UNITS: IN

SCALE: 60:1

ELECTRICAL REQUIREMENTS

CUSTOMER: IEWC

NWI P/N: TBD

DWG NO: 51261-4

NONE SPECIFIED

CUSTOMER P/N: TBD

DRAWN BY: DP LANGER

DATE: 11/20/2014

REV: 1



MECHANICAL REQUIREMENTS

NONE SPECIFIED

INITIAL RELEASE	1	11/20/14	DPL
REVISION RECORD	REV.	REV DATE	APR
REVISIONS			