


CONDUCTORS - 18 AWG (16X30) TINNED COPPER INSULATED WITH .010" NOMINAL WALL OF S-R PVC TO A NOMINAL O.D. OF .066".
(COLOR CODE SEE DRAWING BELOW)

TAPE SHIELD

.0012" ALUMINUM/POLYESTER, FOIL OUT

CORE FILLER

POLYPROPYLENE AS REQUIRED FOR ROUNDNESS

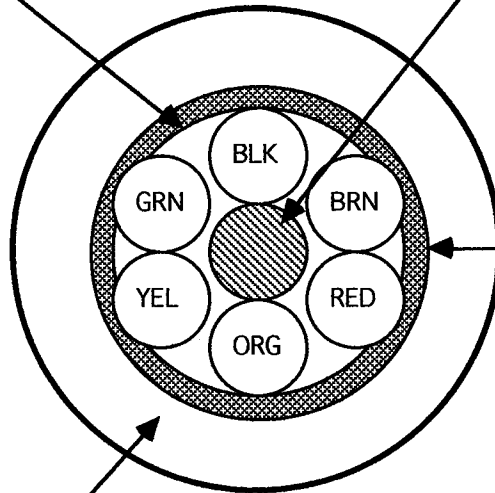

BRAID SHIELD
36 AWG TINNED CU
70% COVERAGE

JACKET - .032" NOMINAL WALL OF GRAY PVC TO A FINAL DIAMETER OF .288" +/- .010"

SURFACE PRINT (black ink)

"E90298 9U AWM STYLE 2464 80C 300V -- LL91737 CSA TYPE CMG"

RoHS APPROVED MATERIALS

DATA GUIDE

CABLE CORP.

ONE ERNRIC PLACE
GARDNER, MA 01440
978-632-0900

REV.	DESCRIPTION	DATE	APP.
0	FIRST ISSUE	5/12/08	

TITLE 6 CONDUCTOR #18 CABLE(1806CSS-8NWE)		
SCALE N/A	P/N 96J30-2	REV
DATE 5/08	DRN. BY WJD	APP. BY