



DESC: 18/6 CABLE 80°C 300V

DWI NO: 1806C011

SCALE: 15x

DATE: 3/8/06

DR. BY: DP LANGER

NWI NO: T.B.D.

CUSTOMER: INDUSTRIAL ELECTRIC

CUSTOMER P/N: T.B.D.

ITEM

SPECS.


- A. 18 GAUGE 16x30TC BUNCHED  
O.D. .049±.003"
- B. 9 MILS PVC INSULATION 80°C 300V  
7 MILS MIN. PVC INSULATION  
O.D. .070±.002"
- C. POLY FILLER
- D. 85% MIN. TC BRAID SHIELD  
36 GAUGE SINGLE ENDS
- E. 30 MILS TUBED PVC JACKET 80°C 300V  
24 MILS MIN. PVC JACKET BLACK JACKET  
CABLE IS NOT UL OR CSA APPROVED

ELECTRICAL REQUIREMENTS:  
NONE SPECIFIED

MECHANICAL REQUIREMENTS:  
NONE SPECIFIED

**NORTHWIRE RESTRICTED**

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

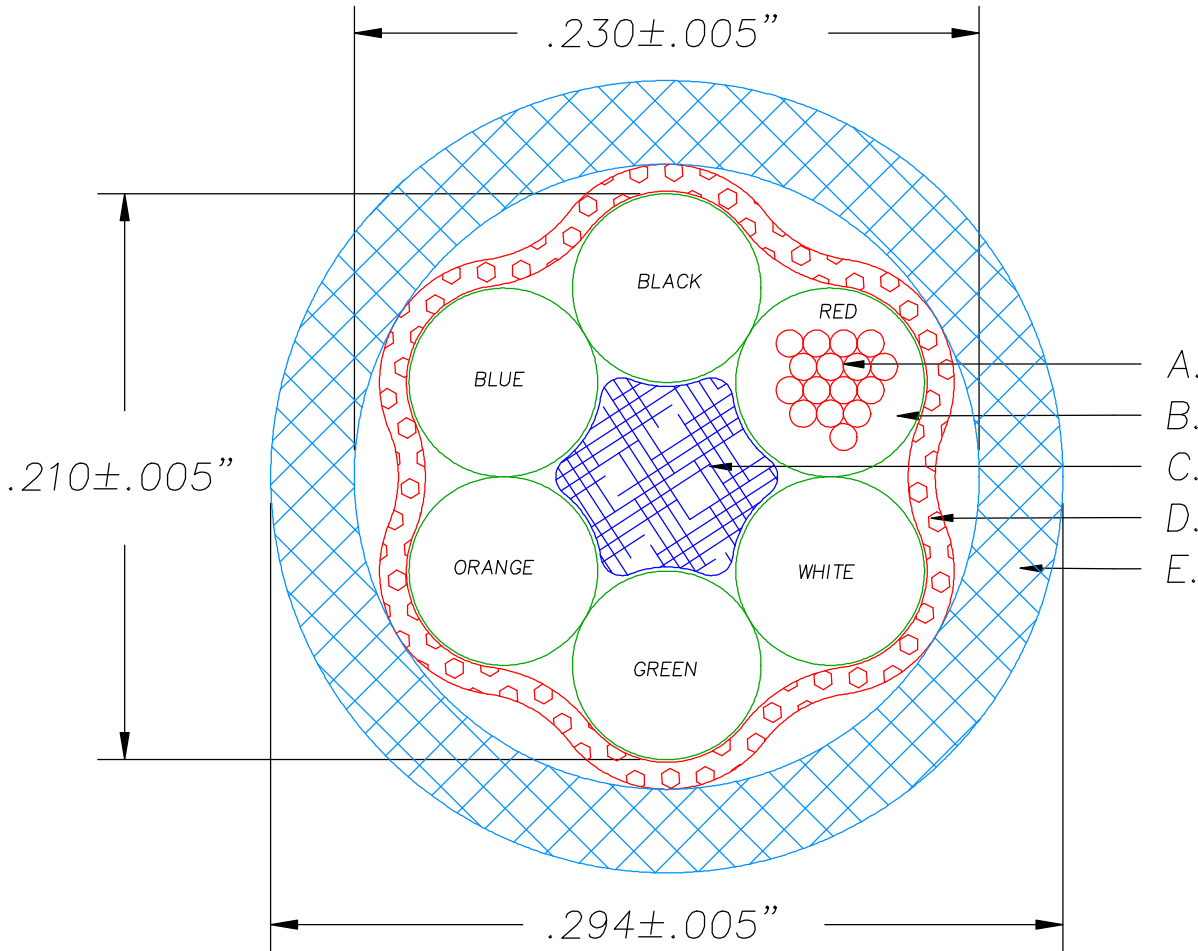

|                 |     |          |          |          |
|-----------------|-----|----------|----------|----------|
| INITIAL RELEASE | A   | 3/8/06   | DPL      |          |
| REVISION RECORD | REV | REV DATE | APPROVAL | APPROVAL |