

Part Number: 1810A




Speaker Cable, 4 Conductor 14 AWG BC, Unshielded, CM

Product Description

Speaker Cable, 4 Conductor 14 AWG stranded (104x34) high conductivity bare copper conductors with polyolefin insulation, CL3 & CM PVC jacket.

Technical Specifications

Product Overview

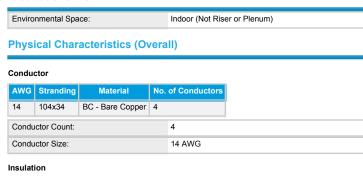

Material	Nominal Diameter
PVC - Polyvinyl Chloride	0.125 in

Color Chart

Number	Color
1	Red
2	Green
3	White
4	Black

Outer Shield Material



Outer Jacket Material

Material	Nominal Diameter	Min. Wall Thickness	Separator Material
PVC - Polyvinyl Chloride	0.39 in	0.002 in	Paper Tape

Construction and Dimensions

Cabling



Electrical Characteristics

Conductor DCR

Nominal Conductor DCR 2.7 Ohm/1000ft

Capacitance

Nom. Capacitance Between Conductors in Quad

Nom. Capacitance Conductor to Conductor

57 pF/ft	18.5 pF/ft
Shielding:	Unshielded

Inductance

Nominal Inductance 0.2 µH/ft

Current

Max. Recommended Current [A] 9.5 Amps per conductor @ 25°C

Voltage

Non-UL Voltage Rating 300V RMS

Electrical Characteristics Notes: 57 pF/ft - Nom. Cap. Between Cond. in a Quad Config.

Temperature Range

Non-UL Temp Rating:	60°C
Operating Temp Range:	-20°C To +60°C

Mechanical Characteristics

Bulk Cable Weight:	105 lbs/1000ft
Max Recommended Pulling Tension:	200 lbs
Min Bend Radius/Minor Axis:	4 in

Applicable Environmental and Other Programs

EU Directive 2000/53/EC (ELV):	Yes
EO Directive 2000/55/EC (ELV).	165
EU Directive 2003/96/EC (BFR):	Yes
EU Directive 2011/65/EU (ROHS II):	Yes
EU Directive 2012/19/EU (WEEE):	Yes
EU Directive 2015/863/EU:	Yes
EU Directive Compliance:	EU Directive 2003/11/EC (BFR)
EU CE Mark:	Yes
EU RoHS Compliance Date (yyyy-mm-dd):	2005-04-01
CA Prop 65 (CJ for Wire & Cable):	Yes
MII Order #39 (China RoHS):	Yes

Suitability

Suitability - Indoor:	Yes

Plenum/Non-Plenum

P	lenum (Y/N):	No

Part Number

Variants

Item #	Color	Footnote
1810A B591000	BLACK, MATTE	С
1810A B59250	BLACK, MATTE	С
1810A B59500	BLACK, MATTE	С

Footnote: C - CRATE REEL PUT-UP.

© 2018 Belden, Inc

All Rights Reserved.

Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described here in are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Belden provides the information and specifications herein on an "ASIS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

All sales of Belden products are subject to Belden's standard terms and conditions of sale.

Belden believes this product to be in compliance with all applicable environmental programs as listed in the data sheet. The information provided is correct to the best of Belden's knowledge, information and belief at the date of its publication. This information is designed only as a general guide for the safe handling, storage, and any other operation of the product itself or the one that it becomes a part of. The Product Disclosure is not to be considered a warranty or quality specification. Regulatory information is for guidance purposes only. Product users are responsible for determining the applicability of legislation and regulations based on their individual usage of the product.