


NUMBER OF PRIMARIES: 16
 CONDUCTOR: 18 AWG (19/30) TINNED PLATED COPPER
 PRIMARY INSULATION: .010" NOM. WALL TEFZEL-750
 COLOR CODE: 15/C BLACK & NUMBERED
 1/C GREEN / YELLOW

PRIMARY O.D.: .067" NOM.
 FILLER: SOLID HYTREL
 BINDER: NON-WOVEN POLYESTER TAPE
 SHIELD: 36 AWG TINNED PLATED COPPER BRAID
 90% MINIMUM COVERAGE
 SEPARATOR: NON-WOVEN POLYESTER TAPE
 INNER JACKET: .060" NOM. WALL SANTOPRENE TPR
 NYLON BRAID REINFORCEMENT
 OUTER JACKET: .060" NOM. WALL SANTOPRENE TPR
 DIAMETER: .586" NOMINAL
 CABLE RATINGS: 600V
 TEMPERATURE: +125°C TO -55°C
 CABLE WEIGHT: 220 LBS/1,000' NOMINAL

COMPLIANCE: EUROPEAN DIRECTIVE 2002/95/EC (RoHS)

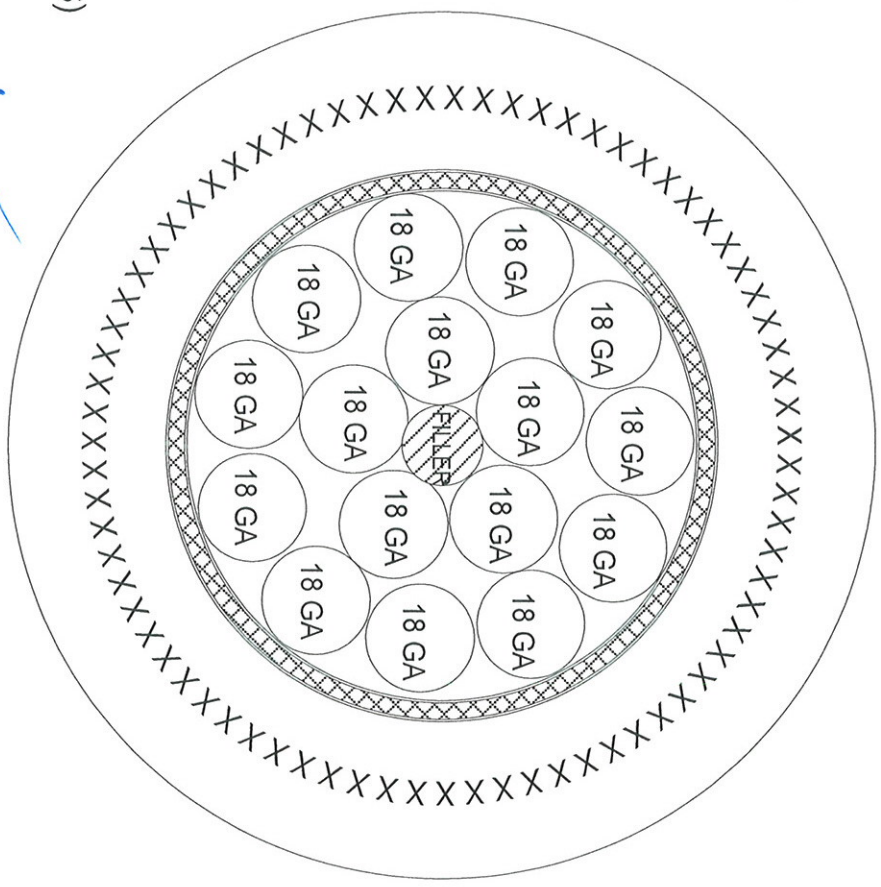

Paul C. Spahr
 01/27/09

REVISIONS:	DATE:

DATE: 12/18/08
DRAWN: RD

INDUSTRIAL ELECTRIC
 WIRE & CABLE, INC.
 16325 W. RYERSON ROAD
 NEW BERLIN, WISCONSIN 53151-3629