

1) CONSTRUCTION: NOM. DIA.
 CONDUCTOR: 18 AWG 16/30 STRANDED TINNED COPPER .045"
 INSULATION: POLYVINYLCHLORIDE, .016" NOM. WALL THICKNESS .077"
 CABLE: (26) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A .481"
 CABLE CORE.
 SHIELD: ALUMINIZED POLYESTER FOIL SHIELD (FOIL OUT, 100% COVERAGE) .484"
 WITH A 20 AWG 10/30 STRANDED TINNED COPPER DRAIN WIRE .564"
 CONTACTING THE METALIZED SURFACE FOR EASY TERMINATION.
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .040" NOM. WALL .564"
 THICKNESS OVERALL CABLE DIAMETER

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C, 80°C & 90°C
 WT./M', NOM., NET. 232 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL 34 PF/FT.
 CAPACITANCE, GROUNDED 63 PF/FT.
 DIELECTRIC WITHSTANDING, MIN 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. PER ASTM B286 7.15 Ω/1000'


4) AGENCY APPROVALS:
 NEC (UL) TYPE CM
 (UL) AWM STYLE 2464 80C 300V
 CSA AWM FT4

5) APPLICATION:
 RoHS COMPLIANT MATERIALS.

6) PRINT:
 E118830 (UL) TYPE CM 18 AWG SHIELDED OR AWM 2464 -- CSA LL51726 AWM I/II A/B 90C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

7) COLOR CODE:
 1. BLK 13. RED/WHT
 2. WHT 14. GRN/WHT
 3. RED 15. BLU/WHT
 4. GRN 16. BLK/RED
 5. ORG 17. WHT/RED
 6. BLUE 18. ORG/RED
 7. WHT/BLK 19. BLU/RED
 8. RED/BLK 20. RED/GRN
 9. GRN/BLK 21. ORG/GRN
 10. ORG/BLK 22. BLK/WHT/RED
 11. BLU/BLK 23. WHT/BLK/RED
 12. BLK/WHT 24. RED/BLK/WHT
 25. GRN/BLK/WHT
 26. ORG/BLK/WHT

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

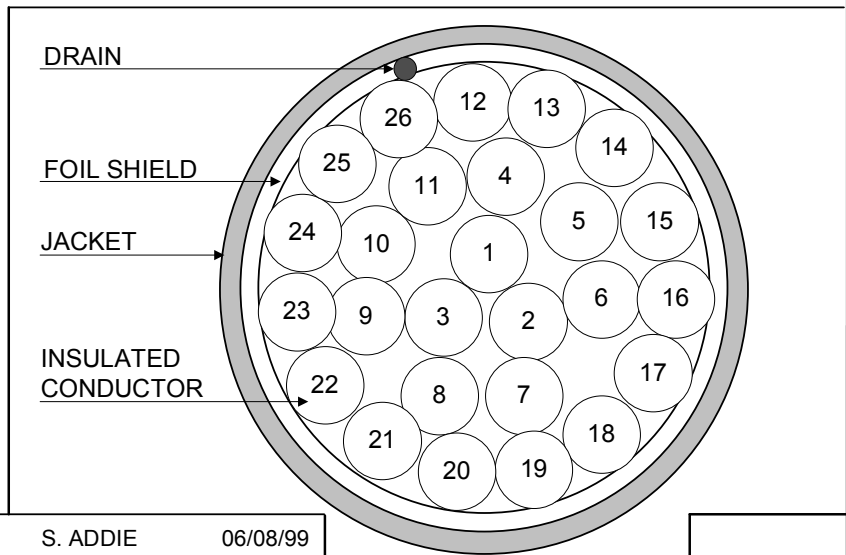

REVISION 04	DATE:	DRAWN S. ADDIE	06/08/99	
REVISED BY	<i>B. Duczynski</i> 1/24/08	CHECKED J. RIVERNIDER	06/08/99	
CHECKED	<i>J. Rivernider</i> 1/24/08	CHECKED		
CHECKED		CUSTOMER APPROVAL:	DATE:	TITLE 26/C 18 AWG PVC/PVC SHIELDED CABLE -- TYPE CM, STYLE 2464, CSA AWM FT4
				QUABBIN P/N 26002 1 OF 1