

Industrial Grade

CAM-TYPE CONNECTORS (UP TO 400A, 600V)

18 Series, Ball Nose



18D22-G



18D31-W


Description	Color	Cat. No.	Cat. No.	Cat. No.
		Complete	Contact	Insulator
Male Detachable Plug - Double Set Screw (Cable Size: #2-2/0)	White	18D22-W	18D22-C*	18SDM-22W*
	Black	18D22-E	18D22-C*	18SDM-22E*
	Brown	18D22-H	18D22-C*	—
	Red	18D22-R	18D22-C*	18SDM-22R*
	Blue	18D22-B	18D22-C*	18SDM-22B*
	Orange	18D22-O*	18D22-C*	—
	Green	18D22-G	18D22-C*	18SDM-22G*
	Yellow	18D22-Y*	18D22-C*	—
Female Detachable Plug - Double Set Screw (Cable Size: #2-2/0)	White	18D31-W	18D31-C*	18SDF-22W*
	Black	18D31-E	18D31-C*	18SDF-22E*
	Brown	18D31-H	18D31-C*	—
	Red	18D31-R	18D31-C*	18SDF-22R*
	Blue	18D31-B	18D31-C*	18SDF-22B*
	Orange	18D31-O*	18D31-C*	—
	Green	18D31-G	18D31-C*	18SDF-22G*
	Yellow	18D31-Y	18D31-C*	—

* Contact factory for availability.


TESTING AND CODE COMPLIANCE

- Meets UL Standards (File #E13399)
- CSA Certified File #152105

DIMENSIONS

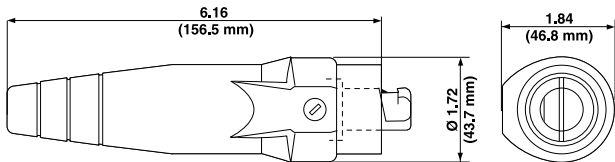

Male Detachable Plug – Double Set Screw

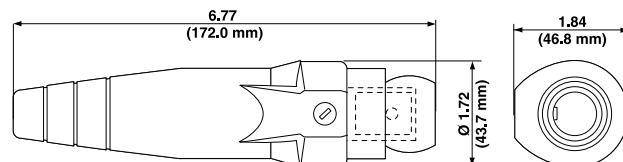

Female Detachable Plug – Double Set Screw