


REV.	DESCRIPTION	DATE
0	Initial release.	8/22/2014

General Composition of Cable

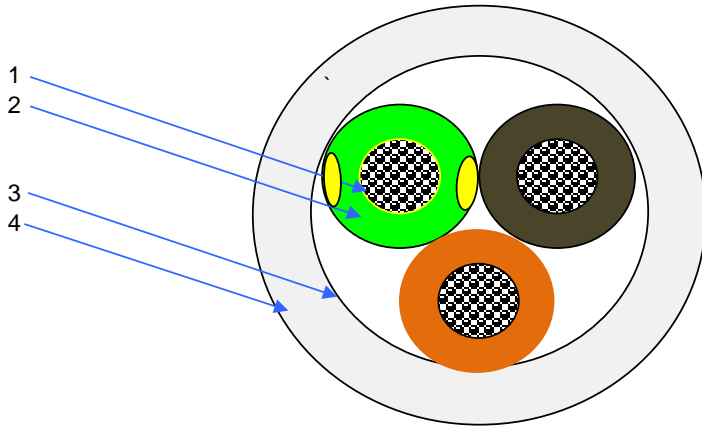

Color Code

1	Brown
2	Orange
3	Green/Yellow
Jacket	White

Physical Data

Description	Dimensions (Nom.)	
	inches	mm
1. Conductor:	16 AWG 65/34 Tinned Copper	0.054 1.37
2. Insulation:	Exar PVC wall thickness: 20 mil	0.094 2.39
3 Cabling:	3 Primaries Lay Length: TBD Direction: Left	0.199 5.05
4 Jacket:	Exar PVC wall thickness: 32 mil	0.263 6.68

Print Legend: IEWC GERMANY GmbH 3 COND 16 AWG E24340 RU AWM STYLE 2517 105C 300 VOLTS VW-1 ---- LL30637 CSA AWM II A/B 90C 300V FT1 ROHS COMPLIANT

General Data

ROHS Status:	Compliant
Temperature:	105°C
Flame Rating:	VW1
Voltage Rating:	300 Volts
Bend Radius: Fixed	5 Times the Diameter
Weight	45 pounds/kft



TITLE
UL 2517 3 conductor 16awg cable

UNLESS OTHERWISE SPECIFIED, DIMENSIONS AND TOLERANCES ARE IN INCHES

DO NOT SCALE THIS DRAWING

DRN.	Steve Blum	DATE	8/22/2014
CKD.		DATE	
SIZE	PART NUMBER	DOCUMENT NUMBER	
A	29-00009-001	14812-B	

The information on this drawing is the proprietary property of Champlain Cable Corporation, and may not be used, reproduced or disclosed to others, in whole or in part, without written authorization.