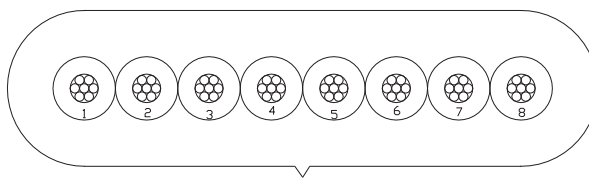


FCC68/8-BLK / IEWC # 2001180

Product Description		Design	
Application: For communication and signal control systems.			
Reference Standard Customer's sample spec.and the general standard			
Multi-construction 8 Core			
Cable Construction		Electrical Characteristics	
Conductor	Bare Copper	Max.Conductor DC Resistance at 20°C (Ω/Km)	<151
Construction	0.15±0.008x7	Rated Temperature(°C)	80
Stranded Dia.(mm)	0.46	Rated Voltage(V)	300
Insulation	PP	Min.Insulation DC Resistance at 20°C (MΩ*Km)	>200
Nom Thickness	0.25		
Insulation Dia.(mm)	0.95±0.05x8C		
Insulation Color	1;Blue; 2;Orange 3; Black; 4, Red 5, Green; 6,Yellow 7, Brown; 8,Grey		
Filler	Chalk		
Jacket	PVC		
Nom Thickness(mm)	0.65		
Dia.(mm)	8.50±0.15×2.46±0.15		
Jacket Color	Black		
Marking			
No Marking			
PACKAGING			
500M/Reel			
Label			