



DESC: 20/2 AWM 2517 105C 300V

DWG NO: FAWM202-061

SCALE: 25x

DATE: 6/8/09

DR. BY: KEN D

NWI P/N: FAWM202-061


CUSTOMER: IEWC

CUSTOMER P/N: TBD

**NORTHWIRE RESTRICTED**

*This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.*

ITEM	SPECS.
A.	20 GAUGE 7x.0121 TINNED COPPER STRANDING O.D. .0363 ± .001"
B.	15 MILS PVC INSULATION 13 MILS MIN. PVC INSULATION O.D. .070 ± .002" UL STYLE 1569
C.	TISSUE PAPER SEPARATOR
D.	30 MILS PRESSURED PVC JACKET 24 MILS MIN. PVC JACKET
COLOR: GRAY	
UL AND CSA APPROVED	
RoHS COMPLIANT	

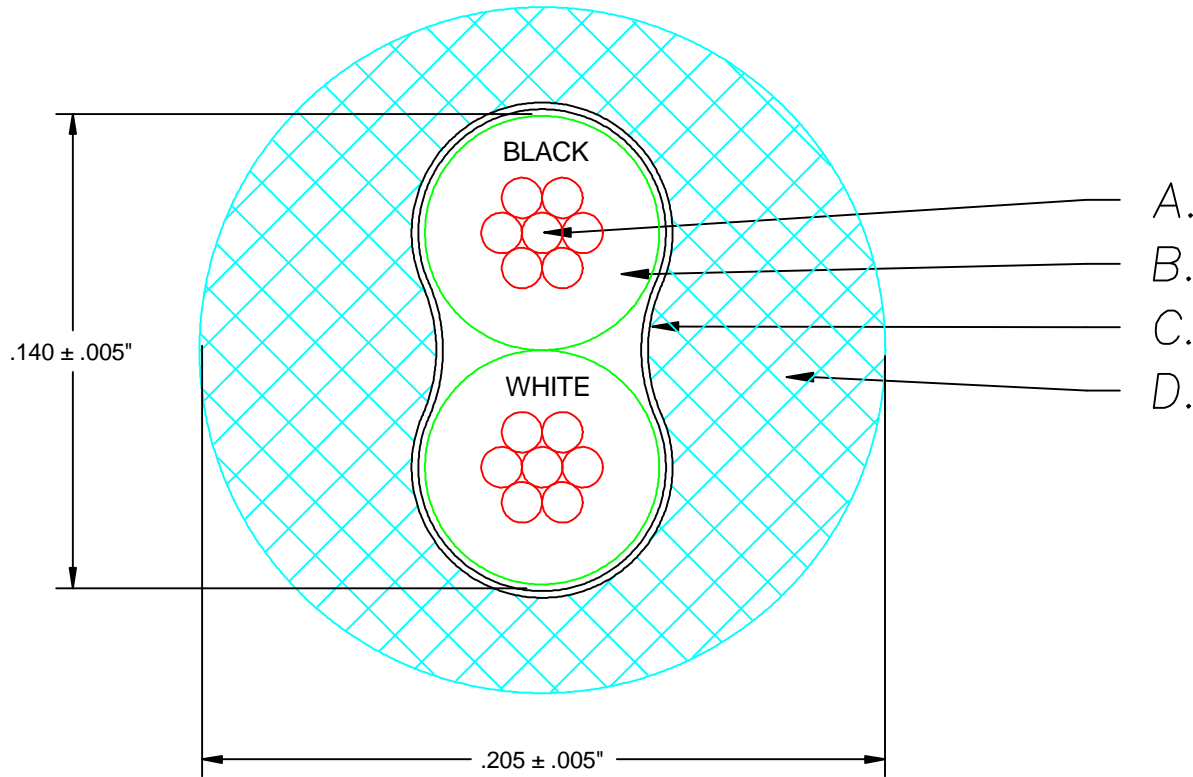

- A.
- B.
- C.
- D.

ELECTRICAL REQUIREMENTS:  
NONE SPECIFIED

MECHANICAL REQUIREMENTS:  
NONE SPECIFIED

CORE DIMENSIONS FOR INTERNAL USE ONLY

LEGEND:

INITIAL RELEASE	A	6/8/09	KAD		
REVISION RECORD	REV	REV DATE	APR 1	APR 2	QA R