

- CONDUCTORS**  
**(2 TOTAL)**
- 20 AWG 26/34 TC WITH .016" WALL THICKNESS 105C 300V INSULATION PVC TO A NOMINAL O.D. OF .072" +/- .002".
  - COLOR CODED AS FOLLOWS: TBD
  - CABLE TWIST : 2-1/4" NOMINAL LEFT HAND DIRECTION

**BINDER**


.001" THICKNESS  
 POLYESTER

**SHIELD**

36AWG TC BRAID  
 85% COVERAGE

**FILLER**

POLYPROPYLENE

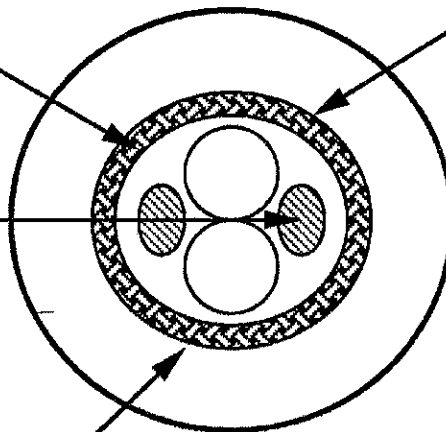

**JACKET**

.032" NOMINAL WALL THICKNESS (COLOR TBD) 105C 300V JACKET PVC TO .232" NOMINAL DIAMETER  
 - SURFACE PRINTED IN CONTRSTING INK: "E90298 RU AWM 2517 105C 300V VW-1"

**CABLE CHARACTERISTICS**

- RoHS COMPLIANT
- \*\*-. CABLE WEIGHT: 36lbs/1000'

**APPROVALS**

UL AWM 2517 105C 300V

**DATA GUIDE CABLE CORP.**

232 SHERMAN STREET  
 GARDNER, MA .1440  
 978-632-0900

REV	DESCRIPTION	DATE	APP.
0	FIRST ISSUE	3/30/11	

TITLE		20/2C AWM RATED 105C 300VOLTS	
SCALE	N/A	P/N	11C28-3
DATE	3/11	DRN. BY	WJD
		APP. BY	