

1) CONSTRUCTION:	CONDUCTOR: 20 AWG 7/28 STRANDED TINNED COPPER	NOM. DIA. .038"
	INSULATION: POLYETHYLENE, .016" NOM. WALL THICKNESS	.070"
	CABLE: COLOR CODED SINGLES TWISTED TOGETHER WITH AN ALUMINUM POLYESTER FOIL SHIELD (FOIL IN, 100% COVERAGE) AND A 20 AWG STRANDED TINNED COPPER DRAIN WIRE CONTACTING THE METALIZED SURFACE FOR EASY TERMINATION.	.143"
JACKET:	LEAD FREE POLYVINYLCHLORIDE, CHROME GRAY, .028" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER .199"

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 75°C
 WT./M', NOM., NET. 23.3 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL 27 PF/FT
 CAPACITANCE, GROUNDED 51 PF/FT
 DIELECTRIC WITHSTANDING, MIN 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. 10.4 OHMS/M'


4) AGENCY APPROVALS:
 (UL) NEC TYPE CM
 CSA TYPE CMG
 UL STYLE 2092

5) APPLICATION:
 INSTRUMENTATION, SOUND, AND BROADCAST CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 6140R (UL) TYPE CM 20 AWG 75C SHIELDED OR AWM 2092 -- CSA LL51726 TYPE CMG 60C -- RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:
 1. CLEAR
 2. BLACK

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

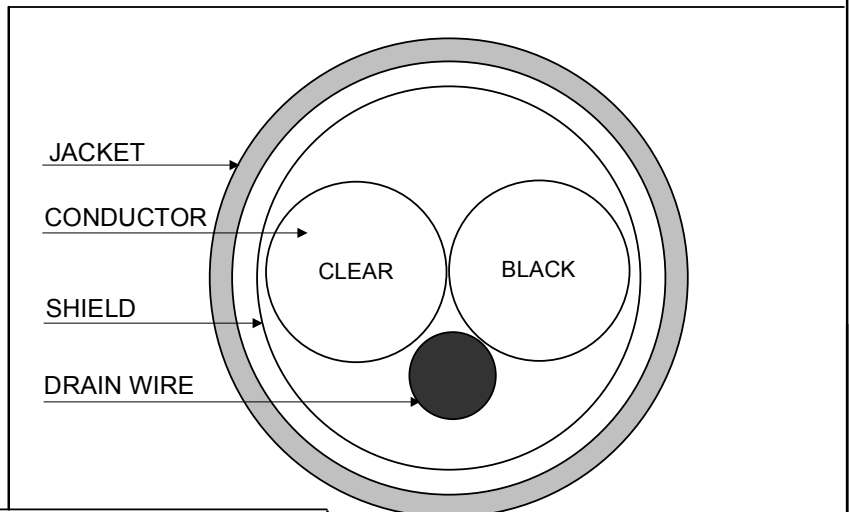

REVISION 06	DATE:	DRAWN S. ADDIE 09/21/95	
REVISED BY	B. M. DUCZYNSKI 6/23/05	CHECKED J. RIVERNIDER 09/21/95	
CHECKED	J. RIVERNIDER 6/23/05	CHECKED M. FERRERO 09/22/95	
CHECKED		CUSTOMER APPROVAL: DATE:	
			TITLE 2/C 20AWG PE/PVC CABLE --TYPE CM, STYLE 2092. CSA TYPE CMG
			QUABBIN P/N 6140 1 OF 1