

SITE SEARCH

[Home](#) [Contact Us](#) [Deca News](#)


Products

Audio/Communication

- In-Wall Speaker
- Shielded Multi-Conductor
- Unshielded Multi-Conductor
- Shielded Multi-Conductor
- Unshielded Multi-Pair
- Shielded Multi-Pair
- Individually Shielded Multi-Pair
- Mini Shielded Multi-Conductor
- Mini Shielded Multi-Pair
- Braid Shielded Multi-Conductor
- Braid Shielded Multi-Conductor Low Cap
- Braid Shielded Multi-Pair
- Braid Shielded Multi-Pair Low Cap
- Individually Shielded
- Braid Shielded Multi-Pair Low Cap
- Overall Foil Shield
- Coaxial Cable
- Fire Alarm Cable
- Hookup Wire
- Industrial Cable
- Plenum Cable
- Telephone/Intercom
- Thermostat Wire

[home](#) >> [Products](#) >> [Audio/Communication](#)

Unshielded Multi-Conductor

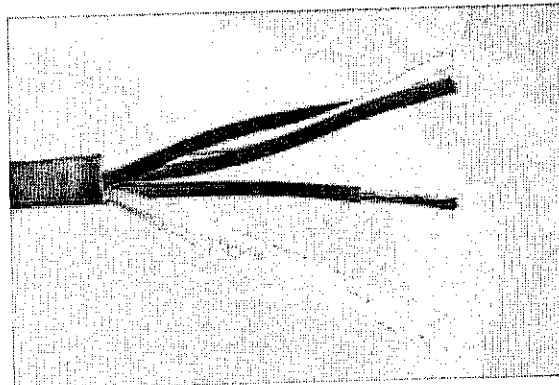

Product Number	Conductor			Insulation Thickness (in)	Jacket Thickness (in)	Nominal O.D. (in)	Cable Mass (lb/1000ft)	Colour Code
	AWG No.	Size	Stranding					
74-212	2	24	7/32	0.009	0.030	0.151	11.03	3
74-213	3	24	7/32	0.009	0.015	0.128	13.3	26
74-214	4	24	7/32	0.009	0.015	0.140	15.83	1
74-215	5	24	7/32	0.009	0.015	0.147	18.44	1
74-216	6	24	7/32	0.009	0.023	0.178	21.08	1
74-217	7	24	7/32	0.009	0.023	0.178	22.94	1
74-218	8	24	7/32	0.009	0.023	0.196	25.6	1
74-219	9	24	7/32	0.009	0.023	0.205	28.26	1
74-220	10	24	7/32	0.009	0.023	0.214	30.96	1
74-222	12	24	7/32	0.009	0.023	0.229	35.26	1
74-225	15	24	7/32	0.009	0.023	0.25	41.88	2
74-227	16	24	7/32	0.009	0.023	0.259	44.38	2
74-228	18	24	7/32	0.009	0.023	0.265	48.9	2
74-230	20	24	7/32	0.009	0.023	0.28	53.1	2
74-235	25	24	7/32	0.009	0.030	0.321	64.39	2
74-240	30	24	7/32	0.009	0.030	0.342	75.01	2
74-270	2	22	7/30	0.009	0.015	0.132	11.7	1
74-273	3	22	7/30	0.009	0.015	0.138	16.9	26
74-264	4	22	7/30	0.009	0.015	0.15	15.66	1
74-275	5	22	7/30	0.009	0.023	0.181	23.5	1
74-276	6	22	7/30	0.009	0.023	0.195	25	1
74-277	7	22	7/30	0.009	0.023	0.195	29.8	1
74-278	8	22	7/30	0.009	0.023	0.217	34.2	1
74-279	9	22	7/30	0.009	0.030	0.245	38.9	1
74-280	10	22	7/30	0.009	0.023	0.24	42.4	1

Traffic Signal Cable	74-282	12	22	7/30	0.009	0.030	0.272	47.8	1
	74-285	15	22	7/30	0.009	0.023	0.28	57.2	2
Water Related Cable	74-290	20	22	7/30	0.009	0.030	0.332	73.1	2
	74-295	25	22	7/30	0.009	0.030	0.371	88.6	2
	74-300	30	22	7/30	0.009	0.030	0.388	103.6	2
	74-302	2	20	7/28	0.009	0.015	0.144	17.2	3
	74-303	3	20	7/28	0.009	0.023	0.169	25.6	1
	74-304	4	20	7/28	0.009	0.023	0.183	31.4	1
	74-305	5	20	7/28	0.009	0.023	0.207	34.9	1
	74-306	6	20	7/28	0.009	0.030	0.231	51.77	1
	74-307	7	20	7/28	0.009	0.023	0.217	48.9	1
	74-309	9	20	7/28	0.009	0.023	0.252	61.2	1
	74-310	10	20	7/28	0.009	0.023	0.26	62.4	1
	74-315	15	20	7/28	0.009	0.030	0.32	103.1	2
	74-316	2	18	16/30	0.012	0.023	0.192	25.8	1
	74-343	3	18	16/30	0.012	0.023	0.206	33.5	1
	74-319	4	18	16/30	0.012	0.023	0.222	41.7	1
	74-623	5	18	16/30	0.012	0.023	0.249	50.14	1
	74-626	6	18	16/30	0.012	0.023	0.265	58.57	1
	74-627	7	18	16/30	0.012	0.023	0.265	65.55	1
	74-629	9	18	16/30	0.012	0.023	0.315	82.48	1
	74-632	12	18	16/30	0.012	0.030	0.369	106.01	2
	74-998	15	18	16/30	0.012	0.030	0.402	128.91	2
	74-999	25	18	16/30	0.012	0.030	0.498	206.39	2
	74-328	2	16	26/30	0.015	0.023	0.235	35.64	1
	74-653	3	16	26/30	0.015	0.023	0.244	47.96	1
	74-671	4	16	26/30	0.015	0.023	0.29	60.09	2
	74-655	5	16	26/30	0.015	0.030	0.337	72.67	2
	74-656	6	16	26/30	0.015	0.030	0.342	85.33	2
	74-657	7	16	26/30	0.015	0.030	0.342	96.19	2
	74-659	9	16	26/30	0.015	0.030	0.397	121.56	2
	74-663	12	16	26/30	0.015	0.030	0.452	158.31	2
	74-677	15	16	26/30	0.015	0.030	0.487	193.34	2
	74-324	2	14	41/30	0.02	0.030	0.301	49.12	1
	74-684	3	14	41/30	0.02	0.030	0.319	66.6	1
	74-699	4	14	41/30	0.02	0.030	0.35	84.82	1
	74-706	6	14	41/30	0.02	0.030	0.418	121.73	2
	74-708	8	14	41/30	0.02	0.030	0.455	156.66	2
	74-323	2	12	65/30	0.03	0.030	0.381	75.94	1
	74-359	3	12	65/30	0.03	0.030	0.408	104.77	1
	74-361	4	12	65/30	0.03	0.030	0.449	134.59	1
	74-987	7	12	65/30	0.03	0.030	0.554	223.21	2

This page last updated: November 27, 2009