

Wdg - 35#
Cable length = 10.5#

Carefree of Colorado
20/3 Cable 300Y

Conductors: 20 4186 Tinned Copper Nominal O.D. .037"

Insulation: Premium Grade PVC
Color Code: Blue + White + Orange

Thickness: .010" Nominal

No. Conductors: 3 Conductors

O.D.: .057" Nominal O.D.

Cable: Cable 3 Conductors to approximately 1.5" LHL
Minimum 8 twists per foot

Filler: .045" Flame Retardant Fibrillated Superbulk Polypropylene Fillers

Jacket: Flexible Black PVC Jacket 105C With UV Inhibitors
(Pull in a .75" x .001" Tissue separator)


Thickness: .032" Nominal

Diameter: .187" Nominal O.D. +/- .003"

Bend: Minimum Bend Radius 5X Cable Diameter

Approvals: UL-2464 CSA - AWM 1-A/B FT1 90° 300 Volt

Put-Up: Approximately 1,000 ft. spools 12" x 10"

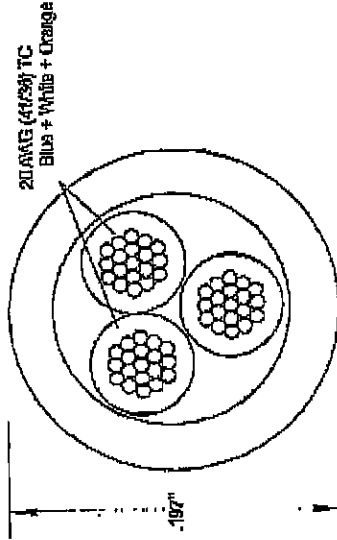

Hueson Corporation

Product Specification

Rev. No. _____
Ed. Hueson _____
Mar. 8, 2007 _____
20/AVG3 Cond. Trile Cable DC
Carefree 20/3-300Y

| | | |
|-----------|------|----------|
| POST CITY | DATE | REVISION |
| | | |
| | | |