



DESC: 20/3 AWM 20233 80°C 300V

DWG NO: FAWM203-039

SCALE: 20x

DATE: 02/28/06

DR. BY: KJR

NWI P/N: FAWM203-039


NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

CUSTOMER: NACCO

CUSTOMER P/N: NACCO 1633685

ITEM	SPECS.
A.	20 AWG 19X.0073" TC UNILAY
B.	10 MIL MINIMUM AVERAGE HYTREL INSULATION 80°C 7 MIL MINIMUM HYTREL INSULATION 300V OD .058±.001" STYLE #10907
C.	SPUN NYLON WRAP
D.	TISSUE PAPER SEPARATOR
E.	30 MIL MINIMUM AVERAGE PRESSURED POLYURETHANE 24 MIL MINIMUM PRESSURED POLYURETHANE JACKET COLOR BLACK
CABLE IS UL AND CSA RECOGNIZED	

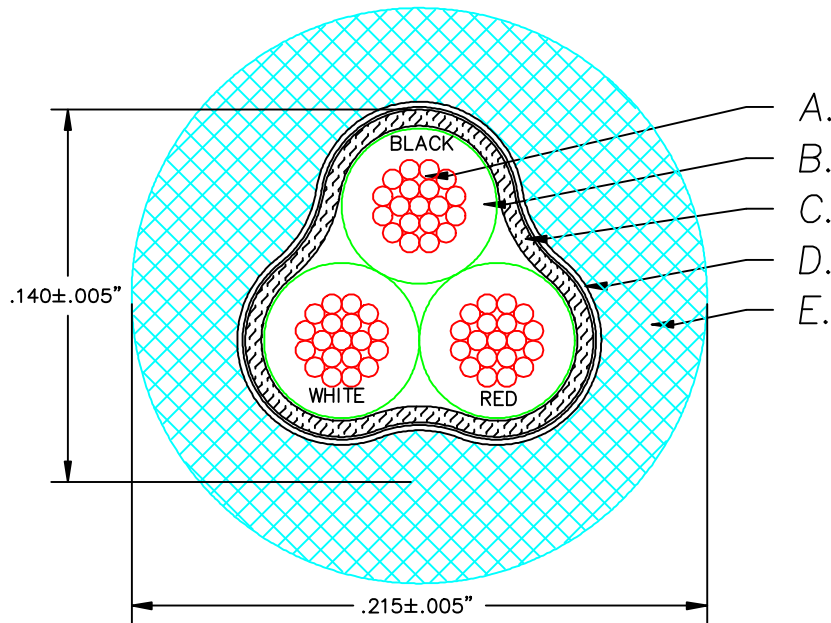

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

WHITE INK PRINTED LEGEND TO READ:
RU AWM E54661 80C 300V CSA AWM LL54185 I/II A/B 80C 300V FT1

REMOVED DEGREE SYMBOLS FROM LEGEND	B	11/10/08	KJR	KJR
INITIAL RELEASE	A	02/28/06	KJR	KJR
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL