

**#5170 3 Conductor 20 AWG Cable**

**Conductors:** 20 AWG 7/28 Tinned Copper

**Insulation:** Premium Grade PVC UL-1007/1569

**Thickness:** .016" Nominal to .070" Conductor O.D.

**No. of Conds:** 3 Conductors Red, White, Blue

**Cabled:** 3 Conductors Cabled with clear mylar binder tape


**Overall Jacket:** .032" Gray PVC Jacket -20°C to + 80°C

**Diameter:** .216" Nominal O.D.

**Ratings:** UL Style 2464 80°C 300V CSA CMG 60°C  
NEC Article 800 Type CM (UL: 75°C)

Also meets UL Style 2576 80C 150V

REVISIONS			
ZONE	REV	DESCRIPTION	DATE

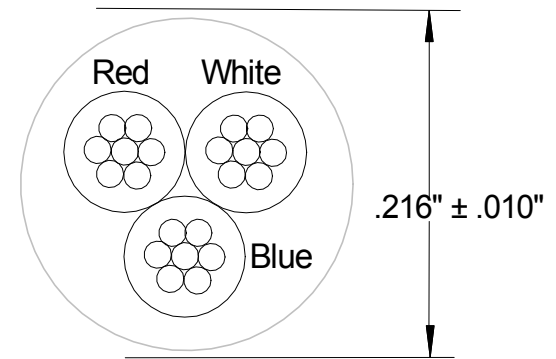

<i>Product Specification</i>		
Drawn By: B. Hanlon	Product Description: 20 AWG 3 Cond. Cable	REV 0
Date: May 24, 2010	Drawing No.	