


 DESC: 20/3 AWM 2517 105C 300V
 DWG NO: FAWM203-061

 SCALE: 25x
 DATE: 6/8/09
 DR. BY: KEN D
 NWI P/N: FAWM203-061

 CUSTOMER: IEWC
 CUSTOMER P/N: TBD

NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

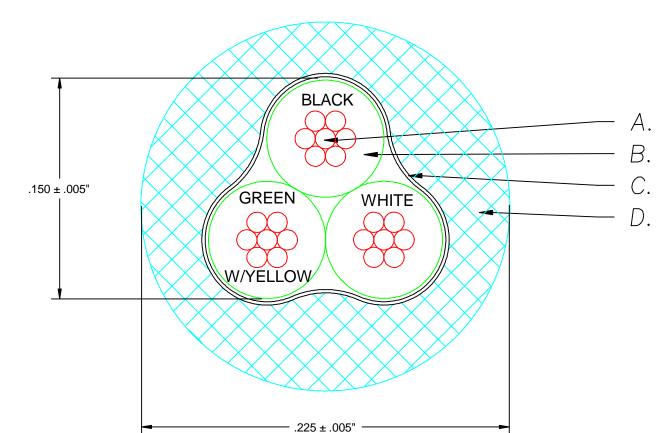

20 GAUGE 7x.0121 TINNED COPPER STRANDING O.D. .0363 ± .001"

B. 15 MILS PVC INSULATION 13 MILS MIN. PVC INSULATION 0.D. .070 ± .002" UL STYLE 1569

C. TISSUE PAPER SEPARATOR

D. 30 MILS PRESSURED PVC JACKET 24 MILS MIN. PVC JACKET

COLOR: GRAY

ITEM SPECS.

UL AND CSA APPROVED

RoHS COMPLIANT

ELECTRICAL REQUIREMENTS: NONE SPECIFIED

MECHANICAL REQUIREMENTS: NONE SPECIFIED

CORE DIMENSIONS FOR INTERNAL USE ONLY

LEGEND:

INITIAL RELEASE	Α	6/8/09	KAD		
REVISION RECORD	REV	REV DATE	APR 1	APR 2	QA R