

1) CONSTRUCTION:

CONDUCTOR:	20 AWG 7/28 STRANDED TINNED COPPER	NOM. DIA.	.038"
INSULATION:	SEMI-RIGID POLYVINYLCHLORIDE, .013" NOM. WALL THICKNESS		.064"
CABLE:	(4) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE		.145"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER	.219"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
WT./M', NOM., NET.	31.5 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL	26 PF/FT.
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE MAX., PER ASTM B286	10.4 OHMS/M'


4) AGENCY APPROVALS:
 (UL) NEC TYPE CM
 CSA AWM FT4
 UL STYLE 2464


5) APPLICATION:
 INSTRUMENTATION, AUDIO, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 6100R (UL) TYPE CM 20 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

7) COLOR CODE:
 1. BLACK
 2. WHITE
 3. RED
 4. GREEN

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

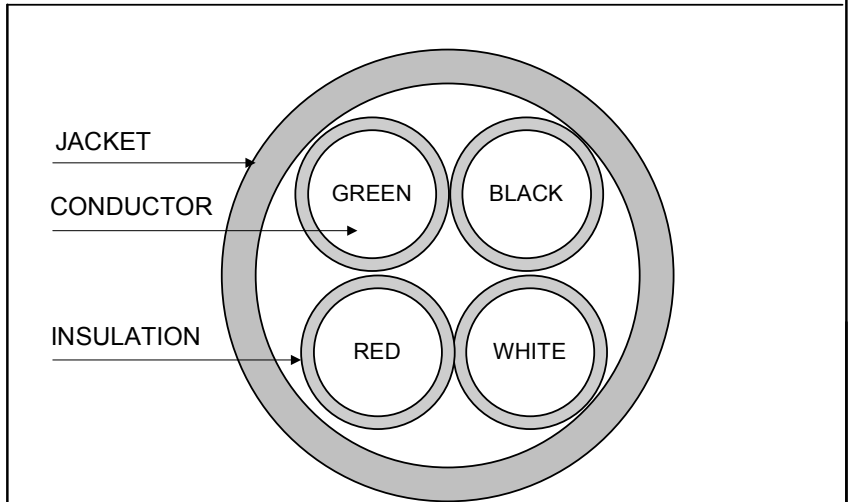

REVISION 03	DATE:	DRAWN S. ADDIE	04/04/96	
REVISED BY	B. M. DUCZYNSKI 9/30/05	CHECKED J. RIVERNIDER	04/04/96	
CHECKED	G. MELNIK 10/3/05	CHECKED M. FERRERO	04/04/96	
CHECKED		CUSTOMER APPROVAL:	DATE:	TITLE
				4/C 20AWG PVC/PVC CABLE --TYPE CM, STYLE 2464, CSA AWM FT4
				QUABBIN P/N
				6100
				1 OF 1