



DESC: 20/4 AWM 20233 (1 PAIR) 80°C 300V

DWG NO: 2004A026.dwg

SCALE: 15x

DATE: 07/15/05

DR. BY: KJ RECTOR

NWI NO: FAWM204-049

CUSTOMER: SEE BELOW

CUSTOMER P/N: 1702944


ITEM

SPECS.

- A. SUB ASSEMBLY
  - B. 20 AWG 26X34TC BUNCHED
  - C. 15 MIL MINIMUM AVERAGE POLYPROPYLENE INSULATION  
13 MIL MINIMUM POLYPROPYLENE INSULATION  
OD .070±.002" STYLE #10152
  - D. NYLON TAPE WRAP
  - E. TISSUE PAPER SEPARATOR
  - F. 30 MIL MINIMUM AVERAGE PRESSURED POLYURETHANE  
24 MIL MINIMUM PRESSURED POLYURETHANE JACKET  
COLOR BLACK 80°C 300V
- CABLE IS UL AND CSA RECOGNIZED

SUB ASSEMBLY A

- A1. 20 AWG 26X34TC BUNCHED
- A2. 9 MIL MINIMUM AVERAGE POLYPROPYLENE INSULATION  
7 MIL MINIMUM POLYPROPYLENE INSULATION  
OD .059±.002" 80°C 300V STYLE #10152
- A3. 20 AWG 7X.0121"TC DRAIN WIRE
- A4. DOUBLE TC SPIRAL SERVE SHIELD
- A5. CLEAR MYLAR WRAP




**ELECTRICAL REQUIREMENTS:**

NONE SPECIFIED

**MECHANICAL REQUIREMENTS:**

NONE SPECIFIED

CORE DIMENSIONS FOR INTERNAL USE ONLY

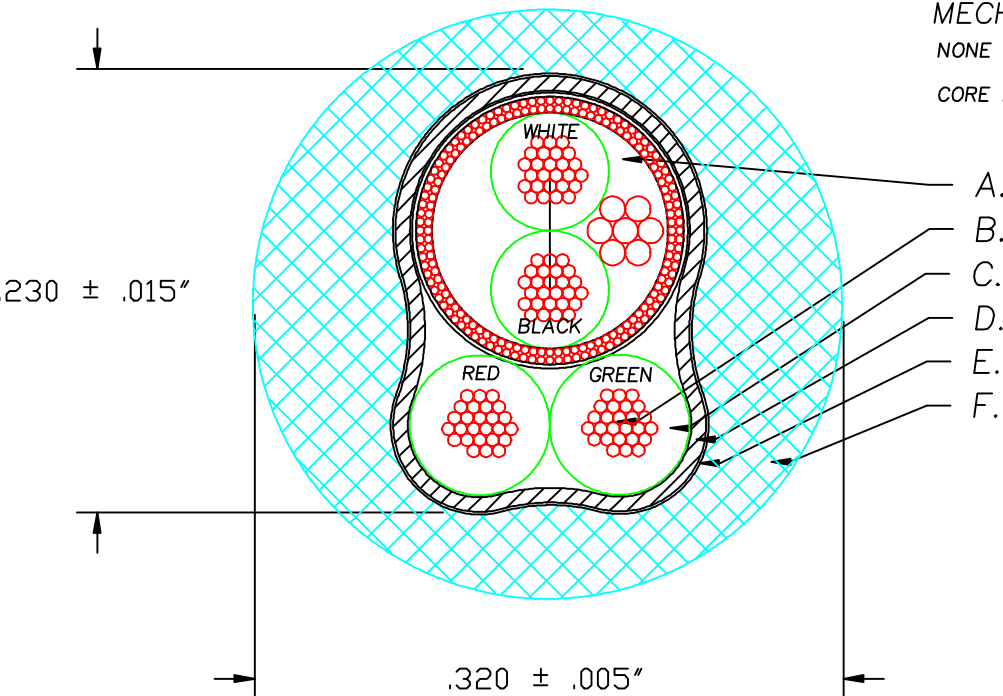

WHITE INK PRINTED LEGEND TO READ:  
RU AWM E54661 80°C 300V CSA AWM LL54185 1/II A/B 80°C 300V FT1

CHANGED CUST. PART NUMBER	F	8/26/08	KAD	
CHANGED CONDUCTORS FROM PVC 30 MILS, .098 O.D.	E	8/25/08	KAD	
CHG CORE OD FRM .260±.005"	D	01/10/07	KJR	
ADD IEWC TO DRAWING	C	8/17/05	DPL	
ADDED LEGEND	B	07/21/05	KJR	
INITIAL RELEASE	A	07/15/05	KJR	
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL

CUSTOMER	CUSTOMER P/N:
IEWC	2004CSP-ONW
ALPHABET	1702944

**NORTHWIRE RESTRICTED**

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.