




Multi-Pair - Shielded

Multi-Pair Overall Foil Shield - 105°C CSA - FT-4 - UL

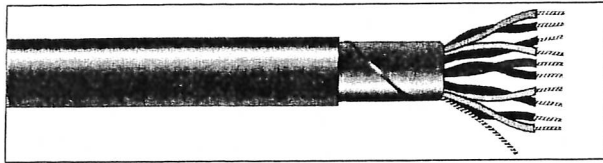

Stranded Tinned Copper Conductors
Twisted Pairs
SR PVC Insulation
100% Aluminum Foil Shield
Stranded Tinned Copper Drain Wire
PVC Jacket - Grey
-20° C + 105° C
Colour Code: Chart 3

Cat. No.	No. Pairs	Cond. Size	Cond. Strand	Drain Wire Size	Insul. Thick	Jkt. Thick	Nom O.D.	Voltage	Put-Up meters	Weight lbs.
6601	1	24	7x32	24	.010	.020	.130	600	300/150	12/6
6602	2	24	7x32	24	.010	.023	.197	600	300/150	22/11
6603	3	24	7x32	24	.010	.023	.210	600	300/150	28/14
6604	4	24	7x32	24	.010	.023	.230	600	300/150	36/18
6605	5	24	7x32	24	.010	.023	.254	600	300/150	40/20
6606	6	24	7x32	24	.010	.023	.261	600	300/150	46/23
6609	9	24	7x32	24	.010	.030	.319	600	300/150	66/33
6610	10	24	7x32	24	.010	.030	.338	600	300/150	72/36
6612	12	24	7x32	24	.010	.030	.350	600	300/150	82/41
6615	15	24	7x32	24	.010	.030	.379	600	300/150	96/48
6619	19	24	7x32	24	.010	.030	.420	600	300/150	118/59
6625	25	24	7x32	24	.010	.035	.483	600	300/150	148/74
1752	2	22	7x30	24	.010	.023	.218	600	300/150	28/14
1753	3	22	7x30	24	.010	.023	.231	600	300/150	36/18
1754	4	22	7x30	24	.010	.023	.254	600	300/150	44/22
1756	6	22	7x30	24	.010	.023	.289	600	300/150	60/30
1759	9	22	7x30	24	.010	.030	.353	600	300/150	86/43
1762	12	22	7x30	24	.010	.030	.388	600	300/150	108/54
1765	15	22	7x30	24	.010	.030	.423	600	300/150	130/65
1769	19	22	7x30	24	.010	.030	.468	600	300/150	158/79
1777	27	22	7x30	24	.010	.030	.560	600	300/150	216/108
1702	2	20	7x28	22	.010	.023	.241	600	300/150	36/18
1703	3	20	7x28	22	.010	.023	.256	600	300/150	44/22
1704	4	20	7x28	22	.010	.023	.282	600	300/150	56/28
1706	6	20	7x28	22	.010	.030	.336	600	300/150	78/39
1709	9	20	7x28	22	.010	.030	.393	600	300/150	110/55
1712	12	20	7x28	22	.010	.030	.435	600	300/150	140/70
1715	15	20	7x28	22	.010	.035	.496	600	300/150	170/85
1782	2	18	16x30	20	.012	.023	.290	600	300/150	50/25
1783	3	18	16x30	20	.012	.030	.323	600	300/150	68/34
1784	4	18	16x30	20	.012	.030	.356	600	300/150	84/42
1786	6	18	16x30	20	.012	.030	.406	600	300/150	116/58
1789	9	18	16x30	20	.012	.030	.480	600	300/150	164/82
1792	12	18	16x30	20	.012	.035	.531	600	300/150	210/105
1795	15	18	16x30	20	.012	.050	.620	600	300/150	278/139
1799	19	18	16x30	20	.012	.050	.684	600	300/150	344/172
1825	25	18	16x30	20	.012	.050	.785	600	300/150	430/215