


Vendor # 10183

51 S. Walnut St., P.O. Box 348 Wauregan, CT 06387-0348 Phone: (860) 774-4812 Fax: (860) 774-7330	<h1>C &amp; M</h1> <h2>CORPORATION</h2> <p>"OUR SUCCESS DEPENDS ON YOUR SATISFACTION"</p>	
---	---	--

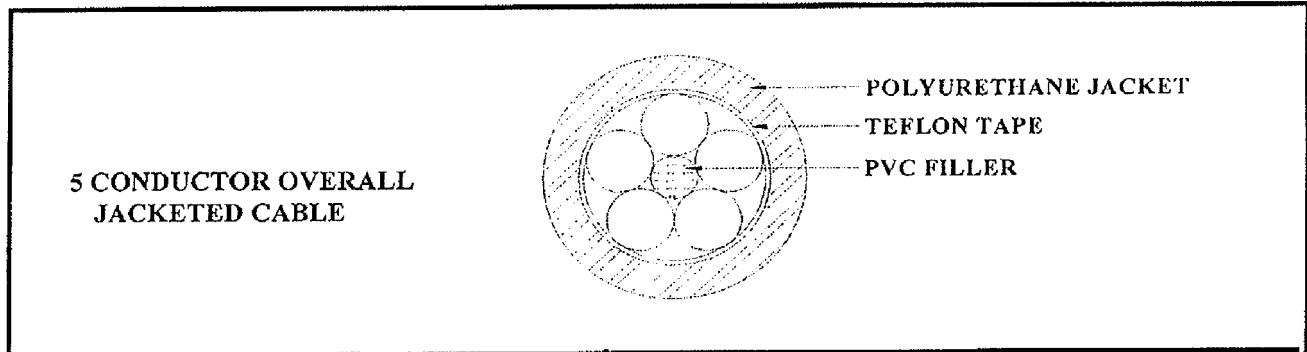

**1.0 PRIMARY:**  
 20 AWG (7x15/40) Tin Cadmium Bronze  
 Polyester Elastomer, .070" +/- .002" Diameter

**2.0 OVERALL CABLING:**  
 Primaries Required: 5  
 Color code: 1. Black  
                   2. White  
                   3. Red  
                   4. Green  
                   5. Blue  
 Filler: PVC, Required for roundness  
 Teflon Tape, 25% overlap

**3.0 JACKET:**  
 Polyurethane, .038" wall thickness  
 .275" +/- .008" final diameter  
 Color: Black  
 Print: E41663 20AWG 5/C AWM 20233  
           80°C 300V --- LL33361 CSA AWM I/II  
           A/B 80°C 300V FT1

**4.0 FINISHED PRODUCT REQUIREMENTS:**  
 UL AWM: 20233, 80°C, 300V  
 CSA: AWM I/II A/B 80°C 300V FT1  
 Operating Temp: -40°C to +80°C  
 Bend Radius: 1.25"  
 1,000,000 Cycles @ 180° Bend

*[Signature]*

8/07/09

B	Added Cycles Note & Reference P/N	NL 03/31/05	ALL VALUES ARE NOMINAL UNLESS OTHERWISE SPECIFIED		C&M DESCRIPTION 5 CONDUCTOR OVERALL JACKETED CABLE (Ref. NMHG P/N 524203968)	
A	Initial Release	JCA 01/13/05	PROPRIETARY INFORMATION DO NOT DUPLICATE WITHOUT WRITTEN CONSENT FROM C&M		C&M PART NUMBER 92689	
REV	DESCRIPTION	ENG/DATE	DRAWN	JAS		
REVISION STATUS			CHECK			SHEET 1 OF 1

*[Signature]*

7/1/09

*[Signature]*