

1) CONSTRUCTION:
 CONDUCTOR: 20 AWG 7/28 STRANDED TINNED COPPER
 INSULATION: LEAD FREE SEMI-RIGID POLYVINYLCHLORIDE, .013" NOM. WALL THICKNESS
 CABLE: (5) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS
 NOM. DIA. .038"
 .064"
 .173"
 OVERALL CABLE DIAMETER .237"

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 80°C
 WT./M', NOM., NET. 37.4 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL 26 PF/FT.
 DIELECTRIC WITHSTANDING, MIN 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE MAX., PER ASTM B286 10.4 OHMS/M'


4) AGENCY APPROVALS:
 (UL) NEC TYPE CM
 CSA AWM FT4
 UL STYLE 2464

5) APPLICATION:
 INSTRUMENTATION, AUDIO, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.
 RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 6105R (UL) TYPE CM 20 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

7) COLOR CODE:
 1. BLACK
 2. WHITE
 3. RED
 4. GREEN
 5. BROWN

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

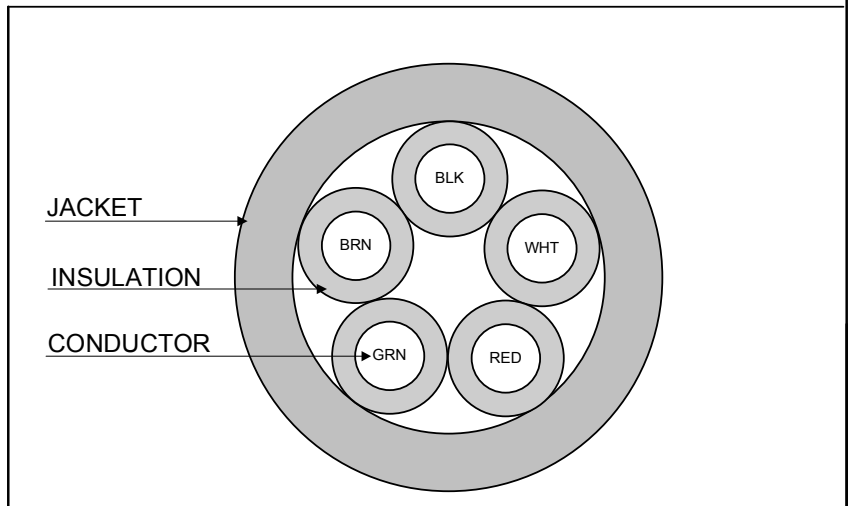

REVISION 01	DATE:	DRAWN B. DUCZYNSKI 8/11/05	
REVISED BY		CHECKED J. RIVERNIDER 8/12/05	
CHECKED		CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 5/C 20AWG PVC/PVC CABLE --TYPE CM, STYLE 2464, CSA AWM FT4
			QUABBIN P/N 6105 1 OF 1