


GeneralCable

5/C #20AWG FLEX CABLE

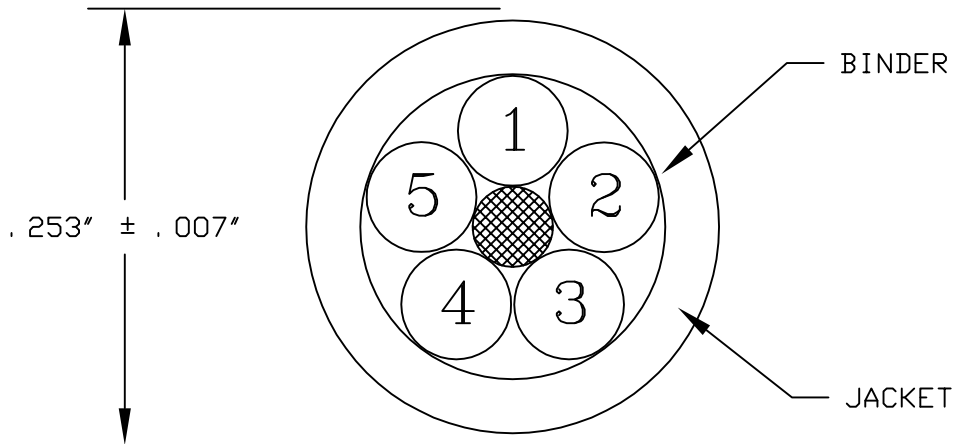

COMPONENTS - SINGLE CONDUCTOR #20AWG (SC#20)
 (ITEMS 1-5) CONDUCTOR: #20AWG 41/36 TINNED COPPER
 INSULATION: CROSS-LINKED POLYETHYLENE-.011" NOMINAL WALL
 DIAMETER: .059" NOMINAL

FILLER - AS REQUIRED TO MAINTAIN A CIRCULAR CABLE CROSS-SECTION

CABLE - CORE: ONE (1) FILLER PULLED IN
 LAYER I: FIVE (5) SC#20 (ITEMS 1-5) CABLED
 AROUND CORE WITH A R. H. LAY

BINDER - .002" PAPER TAPE-NO OVERLAP REQUIRED

JACKET - HYPALON (BLACK)-.044" NOMINAL WALL

DIAMETER - .253" ± .007"

UL - TYPE CL2 90°C 150V

CSA - AWM 90°C 150V

NET CABLE WGT- 46 LBS/1000'

JACKET PRINT - "GENERAL CABLE BRAND REX BRAND (WC) 90C TYPE CL2 (UL)
 5/C 20AWG/CSA AWM IIA 90°C 150V FT1 ROHS COMPLIANT"

COLOR CODE -	ITEM NUMBER	COLOR
	1	BLACK
	2	WHITE
	3	RED
	4	BROWN
	5	GREEN

REVISIONS			
	O	08/26/99	FIRST ISSUE
	A	09/26/06	PRINT
	B	03/08/10	ADD PAPER TAPE
	C	04/12/10	CORRECTION
	D	03/16/12	PAPER TAPE

GeneralCable
 1600 West Main Street, Willimantic, CT 06226-1128
The NEW Power of One

DRAWING NO: 12-1032

REFERENCES	
	IEWC/MILLER ELECTRIC
	GeneralCable P/N 317020
	T-15277

DRAWN BY: W. DRABEK APPROVED BY: M. LAJEUNESSE

THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable