


DGC DATA GUIDE CABLE

Electronic and Electrical Wire & Cable Products

232 Sherman Street Gardner, MA 01440
 Phone: 978-632-0900 Fax: 978-630-1872
 Visit us on our website; www.dataquidecable.com

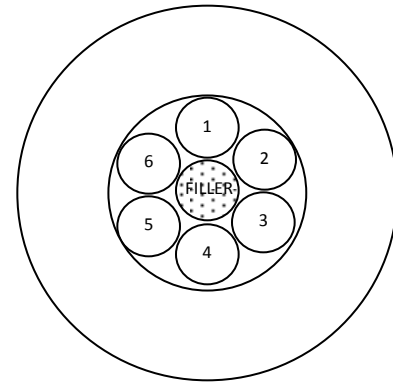

6 CONDUCTOR 20 AWG PVC INSULATION, UNSHIELDED OVERALL GRAY PVC JACKET

CONDUCTOR:

- 20 AWG (7/28) Tinned Annealed Copper Insulated with .016" Nominal Wall of PVC to a Nominal O.D. of .070"
- 6 Conductors Total

COLOR CODE:

- As Indicated

NOTES:

- 3" Nominal Left Hand Direction Cable Lay
- Polypropylene Filler in Core Area
- Overall Polyester Binder Tape Wrap over Cable Core
- Overall .020" Wall Jacket Gray PVC to .253" Nominal Final Diameter
- Surface Printed in Black Ink:
 "E123820 20 AWG TYPE CM (UL) 75C OR AWM 2509 -- LL91737
 CSA TYPE CMG 75C"

COLOR CODE

CONDUCTORS	COLORS
1	BLACK
2	RED
3	WHITE
4	GREEN
5	ORANGE
6	BLUE

AGENCY APPROVALS

- UL CM 75C
- UL AWM 2509 80C 300VOLTS
- CSA TYPE CMG FT4
- CABLE MEETS ROHS DIRECTIVE

REVISION HISTORY

NO.	DATE	BY	DESCRIPTION
0	3/18/96	WD	INITIAL RELEASE
1	8/12/14	WD	REFORMAT, UPDATES

Customer Number	2006C-3DGD
D.G. Part Number	96C14-8
Prepared By:	KAM
Reviewed By:	WJD