



DESC: 20/6 AWM 2502 80°C 30V

NWI NO: FAWM206-023

SCALE: 20x

DATE: 5/24/07

DR. BY: DP LANGER

DWG NO: FAWM206-NWI

NORTHWIRE GUARDIAN LOAD CELL CABLE


ITEM SPECS.

- A. 20 GAUGE 26x34TC BUNCHED
O.D. .036±.002"
- B. 9 MILS POLYETHYLENE INSULATION PER UL AWM 1598
7 MILS MIN POLYETHYLENE INSULATION
O.D. .059±.002"
- C. POLY FILLER
- D. ALUMINUM FOIL SHIELD; FOIL OUT
25% MIN. OVERLAP 100% COVERAGE
- E. 22 GAUGE 7x.0096TC DRAIN
- F. 75% MIN. TC BRAID SHIELD
36 GAUGE SINGLE ENDS
- G. 35 MILS TUBED PVC JACKET 80°C 30V
26 MILS MIN. PVC JACKET RED JACKET
UL AND CSA RECOGNIZED

COLOR ROTATION IS NOT CRITICAL

NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

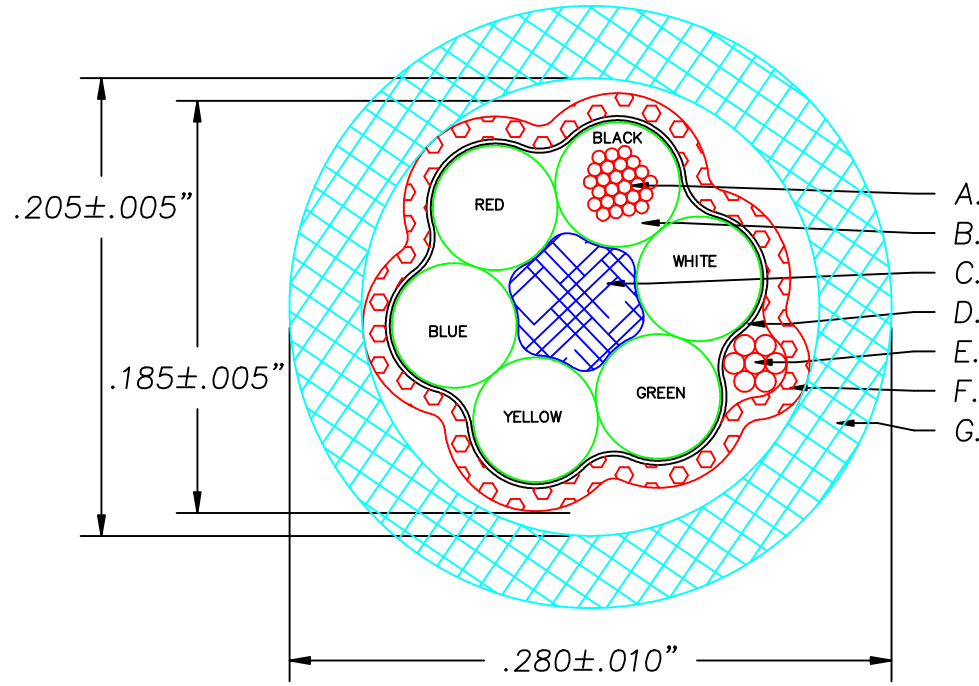

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

CORE DIMENSIONS FOR INTERNAL USE ONLY

REMOVED SPECIFIC LENGTH P/N'S	B	10/27/07	DPL		
INITIAL RELEASE	A	5/24/07	DPL		
REVISION RECORD	REV	REV DATE	APR 1	APR 2	QA R