

1) CONSTRUCTION: NOM. DIA.
 CONDUCTOR: 20 AWG 7/28 STRANDED TINNED COPPER .038"
 INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .013" NOM. WALL THICKNESS .064"
 PAIRS: COLOR CODED SINGLES TWISTED INTO PAIRS .128"
 CABLE: (6) TWISTED PAIRS TWISTED TOGETHER TO FORM A CABLE CORE .326"
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .035" NOM. WALL THICKNESS
OVERALL CABLE DIAMETER .396"

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 80°C
 WT./M', NOM., NET. 84.6 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL 26 PF/FT.
 DIELECTRIC WITHSTANDING, MIN 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. 10.4 OHMS/M'


4) AGENCY APPROVALS:
 (UL) AWM STYLE 2464
 (UL) NEC TYPE CM
 CSA AWM FT4

5) APPLICATION:
 RoHS COMPLIANT MATERIALS.

6) PRINT:
 E118830 (UL) TYPE CM 20 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 --
(LOT DESIGNATOR)

7) COLOR CODE:
 1. BLACK X BLACK/WHITE
 2. WHITE X WHITE/BLACK
 3. RED X WHITE/RED
 4. GREEN X WHITE/GREEN
 5. BLUE X WHITE/BLUE
 6. YELLOW X WHITE/YELLOW

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

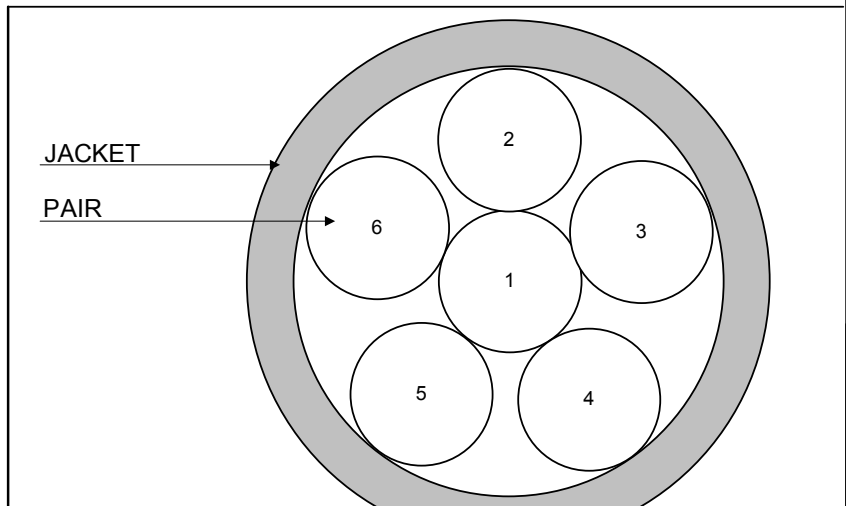

REVISION 02	DATE:	DRAWN B. M. DUCZYNSKI 2/15/05	
REVISED BY	<i>B. Duczynski</i> 7/19/06	CHECKED J. RIVERNIDER 2/15/05	
CHECKED	<i>B. Duczynski</i> 7/19/06	CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 6 PR. 20AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, CSA AWM FT4
			QUABBIN P/N 12073 1 OF 1