


232 Sherman Street Gardner, MA 01440
 Phone: 978-632-0900 Fax: 978-630-1872
 Visit us on our website; www.dataguidecable.com

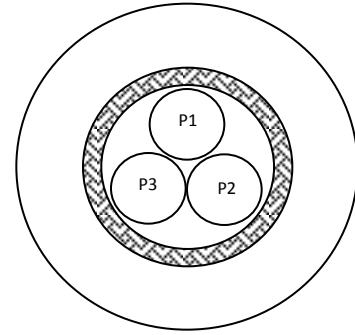

**3 PAIR 20AWG PVC-PVC
OVERALL SHIELD UL, CSA**

CONDUCTORS:

- 20 AWG (7x.0121") Tinned Annealed Copper Insulated with .016" Nominal Wall of PVC to a Nominal O.D. of .068"
- 3 Pair Total
- Color Coded as Indicated
- Each Pair Twisted with 1 3/4" Nominal Left Hand Direction Lay

NOTES:

- Overall 3 1/2" Nominal Left Hand Direction Cable Lay
- Overall .001" Thickness Polyester Tape, 25% Overlap
- Overall 85% Coverage 36 AWG Tinned Copper Braid Shield
- Overall .032" Wall Gray PVC Jacket to .325" Nominal Final Diameter
- Surface Printed in Black Ink:
 "E123820 20 AWG TYPE CM (UL) 75C OR AWM 2464 - - LL91737 CSA
 AWM I/II A/B 80C 300V FT4"

COLOR CODE

PAIR	COLOR
1	WHITE & BROWN
2	GRAY & PINK
3	YELLOW & GREEN

AGENCY APPROVAL

- UL TYPE CM 75C
- UL AWM 2464 80C 300V
- CSA AWM FT4 80C 300V
- RoHS COMPLIANT

REVISION HISTORY

0	2/01/16	WD	FIRST ISSUE

Customer Number	2006POBS-8DGA
D.G. Part Number	03M4-3
Prepared By:	KAM
Reviewed By:	WJD