



DESC: 20/6 AWM 20233 80°C 300V

DWG NO: FAWM206-017

SCALE: 20x

DATE: 02/02/06

DR. BY: KJR

NWI P/N: FAWM206-017

NORTHWIRE RESTRICTED


This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

CUSTOMER: tbd

CUSTOMER P/N: TBD

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

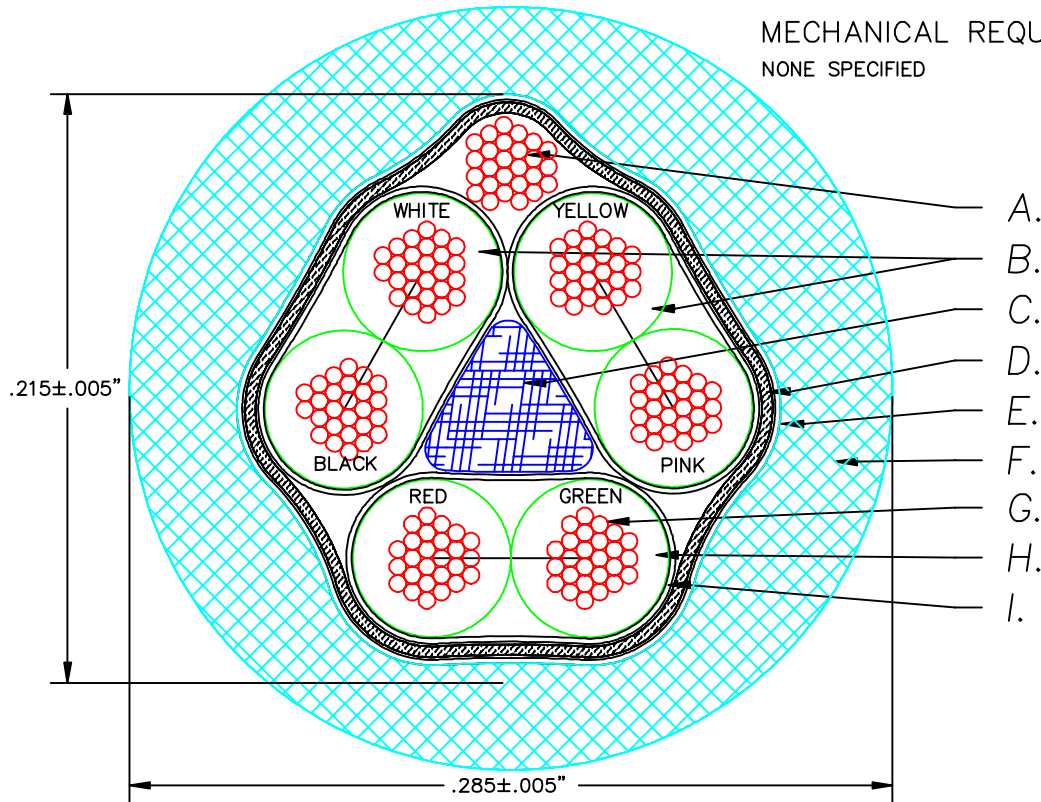

ITEM	SPECS.
A.	20 AWG 26X34TC DRAIN WIRE
B.	SUB ASSEMBLY
C.	POLY FILLER
D.	SPUN NYLON
E.	TISSUE PAPER SEPARATOR
F.	30 MIL MINIMUM AVERAGE PRESSURED POLYURETHANE 24 MIL MINIMUM PRESSURED POLYURETHANE COLOR BLACK 80°C 300V
G.	20 AWG 26X34TC
H.	9 MIL MINIMUM AVERAGE SRPVC INSULATION 7 MIL MINIMUM SRPVC INSULATION OD .059±.002" STYLE #1061
I.	FFE ALUMINUM MYLAR SHIELD (FOIL IN)

CABLE IS UL AND CSA RECOGNIZED

SUB ASSEMBLY	
B1.	20 AWG 26X34TC
B2.	9 MIL MINIMUM AVERAGE POLYPROPYLENE INSULATION 7 MIL MINIMUM POLYPROPYLENE INSULATION OD .059±.002" STYLE #10152
B3.	ALUMINUM MYLAR SHIELD (FOIL OUT)

LEGEND:
RU AWM E54661 80oC 300V CSA AWM LL54185 I/II A/B 80oC 300V FT1

INITIAL RELEASE	A	02/02/06	KJR	
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL