




NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

DESC: 20/7 AWM 2517 105°C 300V	DWG NO: 2007A005
SCALE: 20x	DATE: 12/10/03
CUSTOMER: SEE BELOW	DR. BY: DP LANGER
	NWI NO: FAWM207-006
	CUSTOMER P/N: SEE BELOW

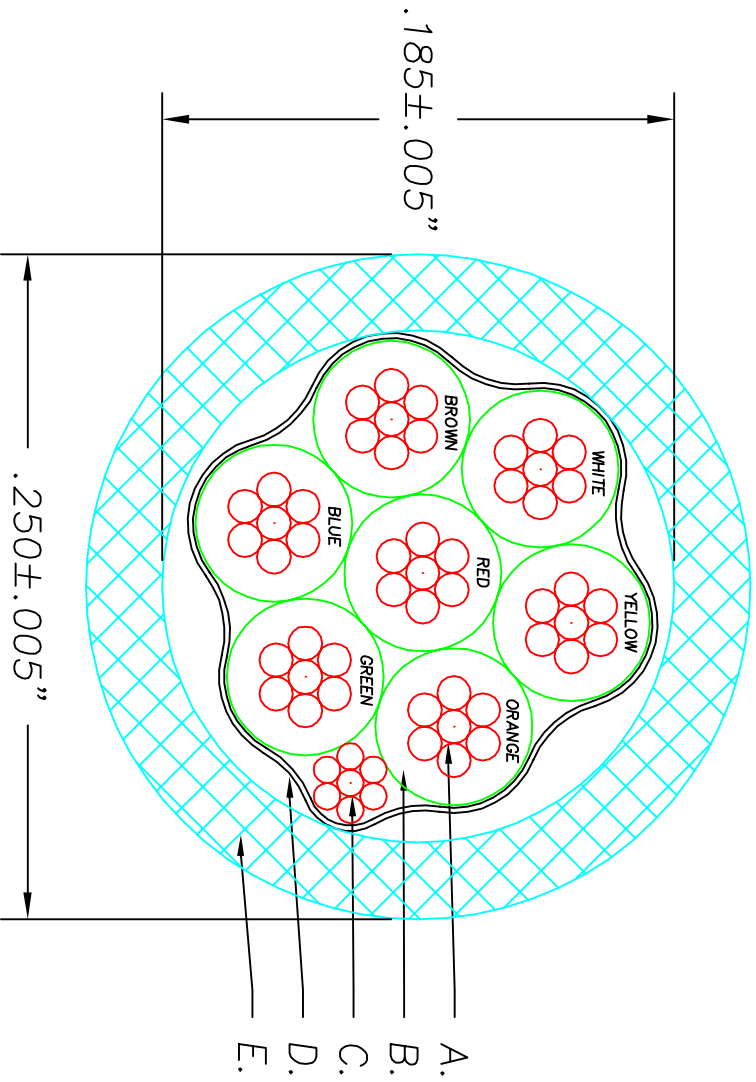

ITEM	SPECS.
A.	20 GAUGE 7x.0121TC CONCENTRIC O.D. .0363±.001"
B.	9 MILS SEMI-RIGID PVC INSULATION 105°C 300V 7 MILS MIN. SEMI-RIGID PVC INSULATION O.D. .059±.002" AWM STYLE 10002
C.	22 GAUGE 7x.0096TC DRAIN
D.	ALUMINUM FOIL SHIELD, FOIL IN 25% MIN. OVERLAP 100% COVERAGE
E.	30 MILS TUBED PVC JACKET 105°C 300V 24 MILS MIN. PVC JACKET BLACK JACKET CABLE IS UL AND CSA APPROVED

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

INITIAL RELEASE	A	12/10/03	DPL
REVISION RECORD	REV	REV DATE	APPROVAL APPROVAL