


GeneralCable

8/C #20AWG FLEX CABLE

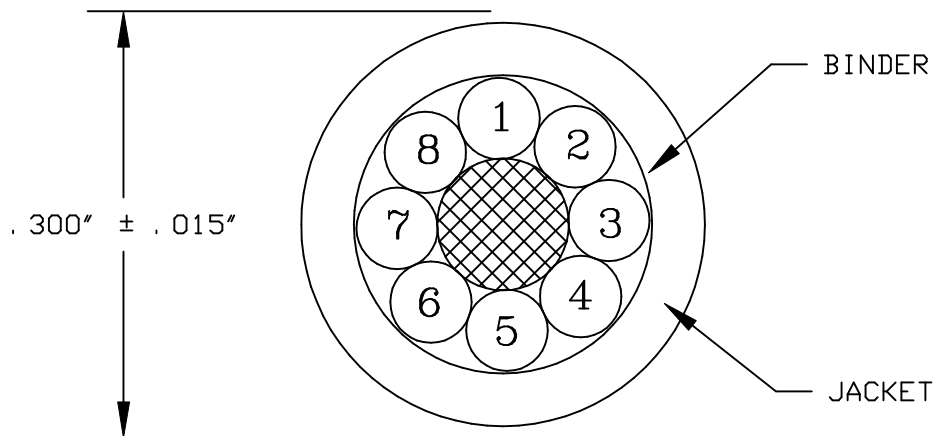

- COMPONENT I (ITEMS 1-8) SINGLE CONDUCTOR #20AWG (SC#20)
 CONDUCTOR: #20AWG 41/36 TINNED COPPER
 INSULATION: CROSS-LINKED POLYETHYLENE-.011" NOMINAL WALL
 DIAMETER: .059" NOMINAL
- FILLER - AS REQUIRED TO MAINTAIN A CIRCULAR CABLE CROSS-SECTION
- CABLE - CORE: ONE (1) FILLER PULLED IN
 LAYER I: EIGHT (8) COMPONENT I (ITEMS 1-8) CABLED
 AROUND CORE WITH A L. H. LAY
- BINDER - .002" PAPER TAPE-APPLIED LONGITUDINAL
- JACKET - CPE (BLACK)-.040" NOMINAL WALL
- DIAMETER - .300" ± .015"
- UL - TYPE CL2 90°C 150V
- CSA - AWM 90°C 150V
- NET CABLE WGT- 70 LBS/1000'
- JACKET PRINT - "GENERAL CABLE BRAND REX BRAND (WC) 90C TYPE CL2 (UL)
 8/C 20AWG/CSA AWM IIA 90°C 150V FT1 ROHS COMPLIANT"

COLOR CODE -	ITEM NUMBER	COLOR
	1	BLACK
	2	WHITE
	3	RED
	4	BROWN
	5	GREEN
	6	ORANGE
	7	YELLOW
	8	BLUE

REVISIONS	0	04/27/11	FIRST ISSUE
	A	05/11/11	P/N CORRECTION
REFERENCES	IEWC/MILLER ELECTRIC 8/C 20AWG		
	GeneralCable P/N PE-114319 PN 977860		

GeneralCable

1600 West Main Street, Willimantic, CT 06226-1128

The NEW Power of One

DRAWING NO: 12-1864

DRAWN BY: CAD	APPROVED BY: M. LAJEUNESSE
---------------	----------------------------

THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable