

09036

1) CONSTRUCTION:  
 CONDUCTOR: 20 AWG 7/28 STRANDED TINNED COPPER  
 INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .013" NOM. WALL THICKNESS  
 CABLE: (9) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE.  
 JACKET: POLYVINYLCHLORIDE, BLACK, .035" NOM. WALL THICKNESS  
 OVERALL CABLE DIAMETER


NOM. DIA.  
 .038"  
 .064"  
 .234"  
 .304"

2) PHYSICAL PROPERTIES:  
 TEMPERATURE RATING, MAX. 75°C & 80°C  
 WT./M', NOM., NET. 62.6 LBS.

3) ELECTRICAL CHARACTERISTICS:  
 CAPACITANCE, MUTUAL, NOM. 28 PF/FT.  
 DIELECTRIC WITHSTANDING, MIN 1500V RMS  
 VOLTAGE RATING, MAX. 300V  
 D.C. RESISTANCE, MAX. PER ASTM B286 10.4 OHMS/M'


4) AGENCY APPROVALS:  
 (UL) AWM STYLE 2464  
 CSA TYPE CMG  
 CSA: CUS TYPE CMG


5) APPLICATION:  
 RoHS COMPLIANT MATERIALS.

6) PRINT: (WHITE INK)  
 E69976  AWM STYLE 2464 -- LL51726 CSA CUS TYPE CMG 20 AWG 75C -- RoHS -- (LOT DESIGNATOR)

- 7) COLOR CODE:  
 1. BLACK  
 2. WHITE  
 3. RED  
 4. GREEN  
 5. BROWN  
 6. BLUE  
 7. ORANGE  
 8. YELLOW  
 9. VIOLET

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

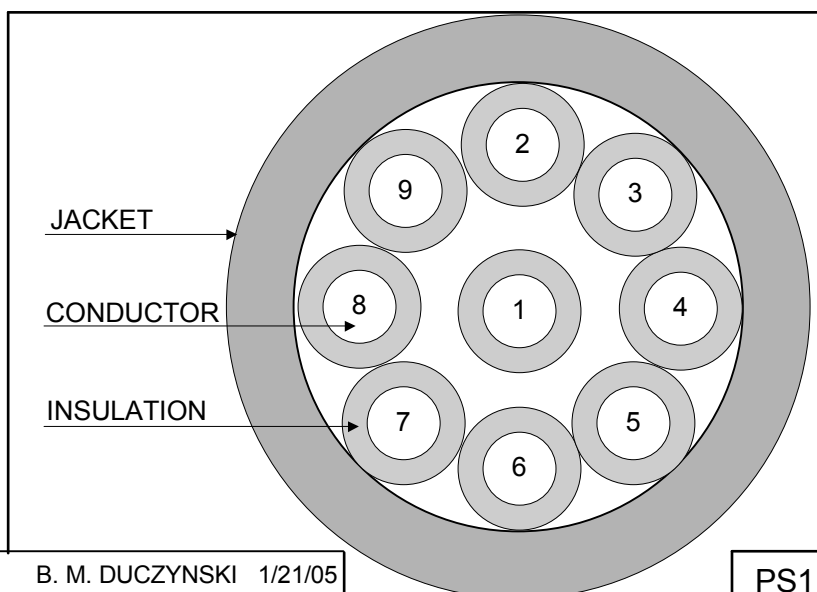

REVISION 03	DATE:	DRAWN B. M. DUCZYNSKI 1/21/05	PS1129
REVISED BY	B. M. DUCZYNSKI 11/16/05	CHECKED J. RIVERNIDER 1/21/05	
CHECKED	J. RIVERNIDER 11/16/05	CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 9/C 20 AWG PVC/PVC CABLE -- STYLE 2464, TYPE CSA CUS CMG
			QUABBIN P/N 09036 1 OF 1