

1) CONSTRUCTION: NOM. DIA.
 CONDUCTOR: 20 AWG 7/28 STRANDED TINNED COPPER .038"
 INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .013" NOM. WALL THICKNESS .064"
 CABLE: (12) INSULATED CONDUCTORS TWISTED TOGETHER COVERED WITH A CLEAR POLYESTER BINDER TO FORM A CABLE CORE .259"
 JACKET: POLYVINYLCHLORIDE, BLACK, .032" NOM. WALL THICKNESS OVERALL CABLE DIAMETER .323"

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 80°C
 WT./M', NOM., NET. 78.1 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL, NOM. 26 PF/FT
 DIELECTRIC WITHSTANDING, MIN 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. PER ASTM 10.4 OHMS


4) AGENCY APPROVALS:
 (UL) STYLE 2464
 NEC (UL) TYPE CM
 CSA AWM FT4

5) APPLICATION:
 RoHS COMPLIANT MATERIALS.

6) PRINT:
 E118830 (UL) TYPE CM 20 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

- 7) COLOR CODE:
1. BLACK
 2. WHITE
 3. RED
 4. GREEN
 5. BROWN
 6. BLUE
 7. ORANGE
 8. YELLOW
 9. VIOLET
 10. GRAY
 11. PINK
 12. TAN

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

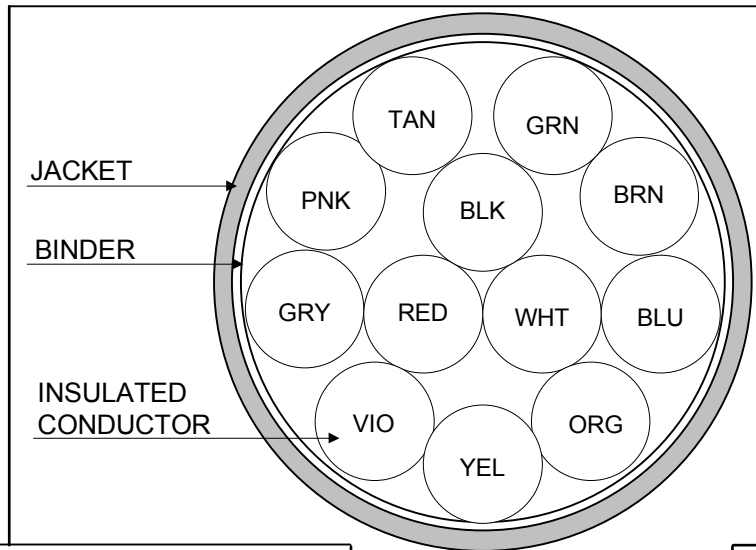

REVISION 03	DATE:	DRAWN B. M. DUCZYNSKI 08/15/02	
REVISED BY	<i>B. Duczynski</i> 6/12/06	CHECKED J. RIVERNIDER 08/15/02	
CHECKED	<i>J. Rivernider</i> 6/12/06	CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 12/C 20AWG PVC/PVC CABLE -- STYLE2464, TYPE CM, CSA AWM FT4
			QUABBIN P/N 12064 1 OF 1